

# ANYONE Internal

by MEGA'GEN



## Key Advantages

Anyone® can be enjoyed by anyone from the beginner to the most experienced implantologist.

Simplified compatible & Single platform prosthetics (11° Internal Hex Connection).



## 222 Characteristics & Advantages

### 222 I. Design Concept

### 223 II. Variety of AnyOne Fixtures

### 224 III. Features

## 226 Fixture Product

### 226 I. Fixture Dimension

### 228 II. Fixture Size

## 231 Cover Screw & Healing Abutment

## 234 Abutment & Prosthetic Options

### 234 I. Fixture Level Prosthesis

### 240 II. Abutment Level Prosthesis

#### 240 1. Solid Abutment & Components

#### 243 2. Octa Abutment & Components

#### 248 3-1. Multi-unit Abutment & Components(N.Type)

#### 256 3-2. Multi-unit Abutment & Components(S.Type)

#### 260 4. Flat Abutment & Components

#### 263 5. EZ CROWN & Components

### 266 III. Overdenture Prosthesis

#### 266 1. Meg-Loc Abutment & Components

#### 268 2. Meg-Ball Abutment & Components

#### 270 3. Meg-Magnet Abutment & Components

#### 272 4. Meg-Rhein Abutment & Components

\* Refer to page 588 for more information on Digital Prosthesis

## 277 Clinical Cases

# Characteristics & Advantages

## I. Design Concept

AnyOne® implant system was developed to be Tissue friendly, Operator friendly, and Patient friendly (T.O.P concept).

From a novice to an expert, every body can enjoy the benefits that AnyOne offers. The convenience of implant placement, the initial stability, excellent soft & hard tissue response and overall shorter treatment time are just few reasons that AnyOne will become your implant choice. Patients can expect minimally invasive surgery with less pain, shorter healing time, and a more esthetic final restoration. The AnyOne implant system truly offers a better experience and satisfaction to both the dentist and the patient.

### 1. Tissue friendly



- Improved surface treatment - XPEED®
- Better crestal bone response due to stress reduction design
- Better cancellous bone response due to evenly-distributed stress
- Better soft tissue response thanks to the bio-friendly S-line shape

### 2. Operator friendly



- Simplified surgical protocol giving predictable initial stability
- Simplified & compatible, single platform prosthetics
- Secure osteointegration with shortened healing times
- High osseointegration

### 3. Patient friendly



- Minimally invasive surgery
- Shorter recovery and treatment time
- Enhanced esthetic results

## II. Variety of AnyOne Fixtures

AnyOne has a variety of choices.

### 1. Easy and convenient "Regular Thread"



#### For Hard Bone

Easy and Simple placement for all cases.

Ø3.5, Ø4.0, Ø4.5, Ø5.0, Ø6.0, Ø7.0

### 2. "Deep Thread" for stronger initial fixation



#### For Soft Bone


New design with extended thread gives substantially stronger initial stability for soft bone application.

Ø4.5, Ø5.5, Ø6.5, Ø7.5, Ø8.0



#### Deep Thread

### 3. "Special 7mm" essential for special case

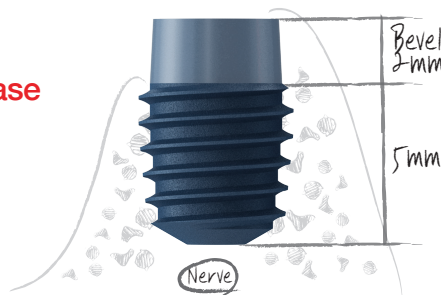

#### For Irregular Ridge

This 'Special 7mm' fixture can be used for non-uniform bone loss case with limited available vertical dimension.

Ø4.5, Ø5.0, Ø6.0, Ø7.0



#### 7mm Implant

# III. Features

## Simplified surgical protocol with predictable initial stability




Fixture design allows easier drilling in any bone density, while ensuring high initial stability

## Diverse prosthetic options for convenient solutions

## Convenient single prosthetic connection for all fixture sizes with 11° internal hex connection


## Reduces stress on crestal bone

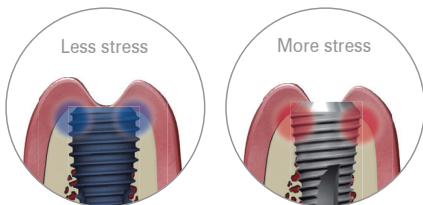


- Placing fixture in alveolar bone is easier to control due to straight upper portion of fixture
- Crestal bone loss is minimized by reducing stress on cortical bone

## KnifeThread®

## Distributes stress on cancellous bone

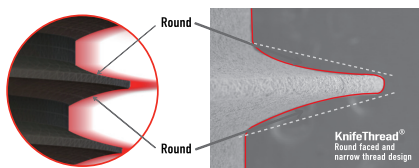


- Best ISQ values due to special **KnifeThread®** design
- Higher initial stability in any bone density due to KnifeThread super self-tapping design
- Ongoing bone condensing & ridge expansion
- Maximizes resistance to compressive force
- Minimizes production of shear force

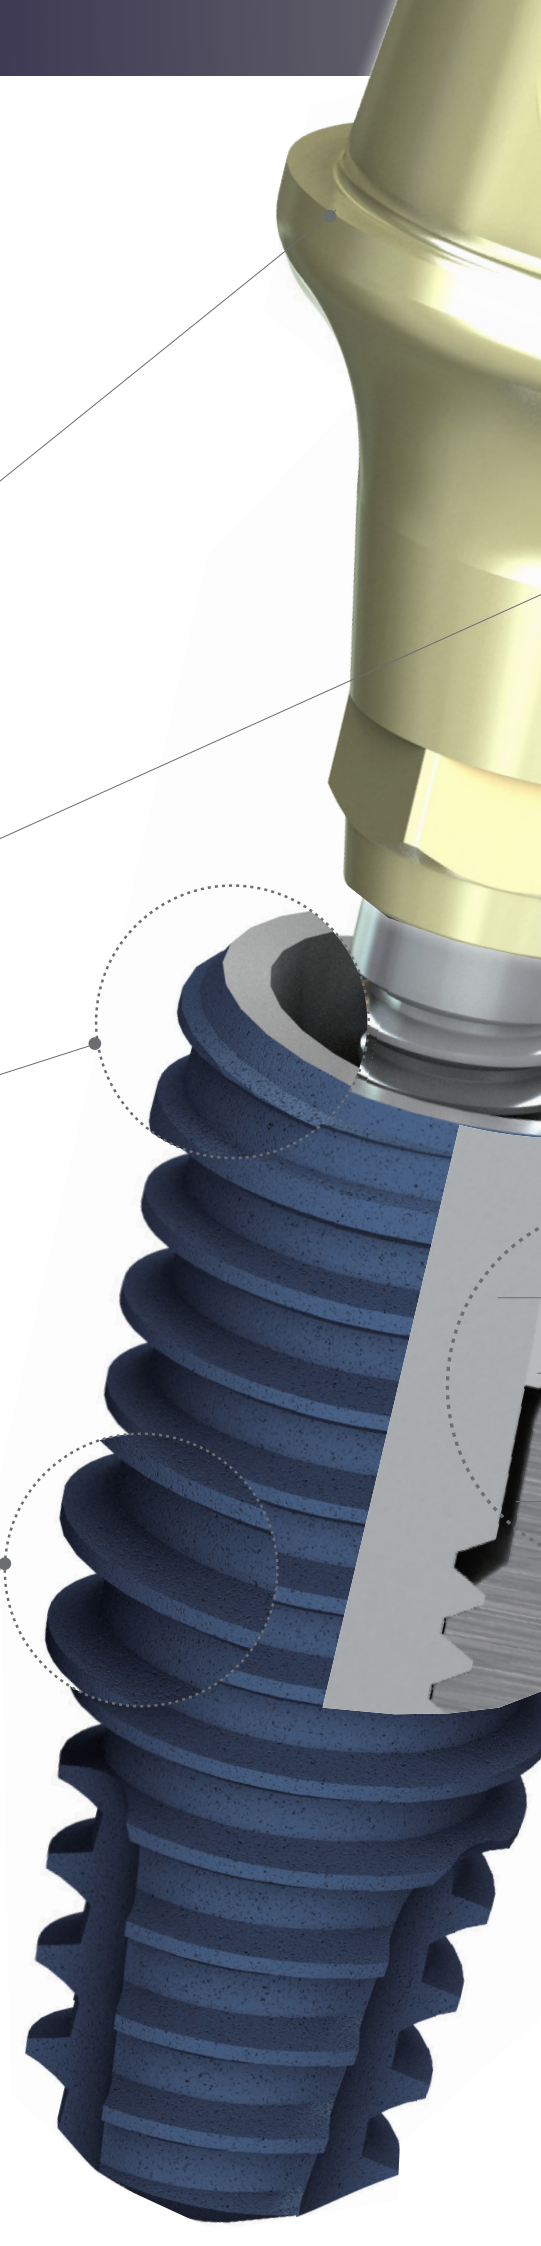



**Advantage for esthetic & CAD / CAM prosthetics**

Sloped shoulder margin of AnyOne abutments are ideal for CAD/CAM zirconia prosthetics



**Excellent soft tissue response**

Biological S-line provides seamless natural-looking & more functional emergence profile




**Higher strength**

- Ø4.5 can be used in molar area without concern of fracturing
- AnyOne wide parallel-wall design is more resistant to fracturing than most other fixtures
- AnyOne is applicable to most cases, reducing need for GBR




**Fatigue test**

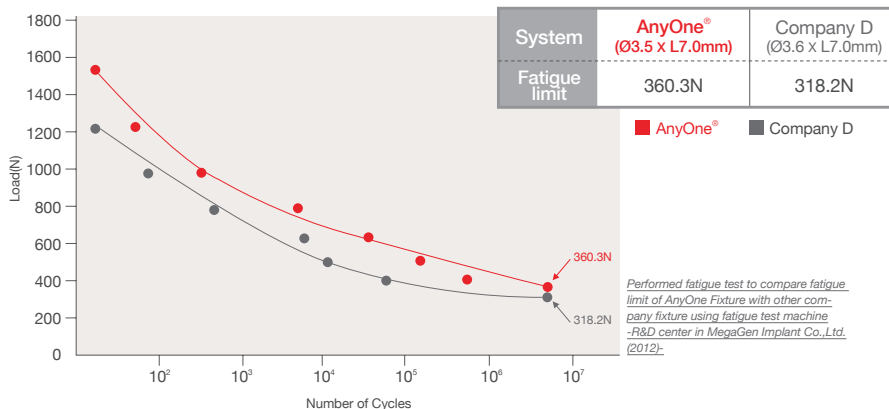

# Fixture Product

## I. Fixture Dimension

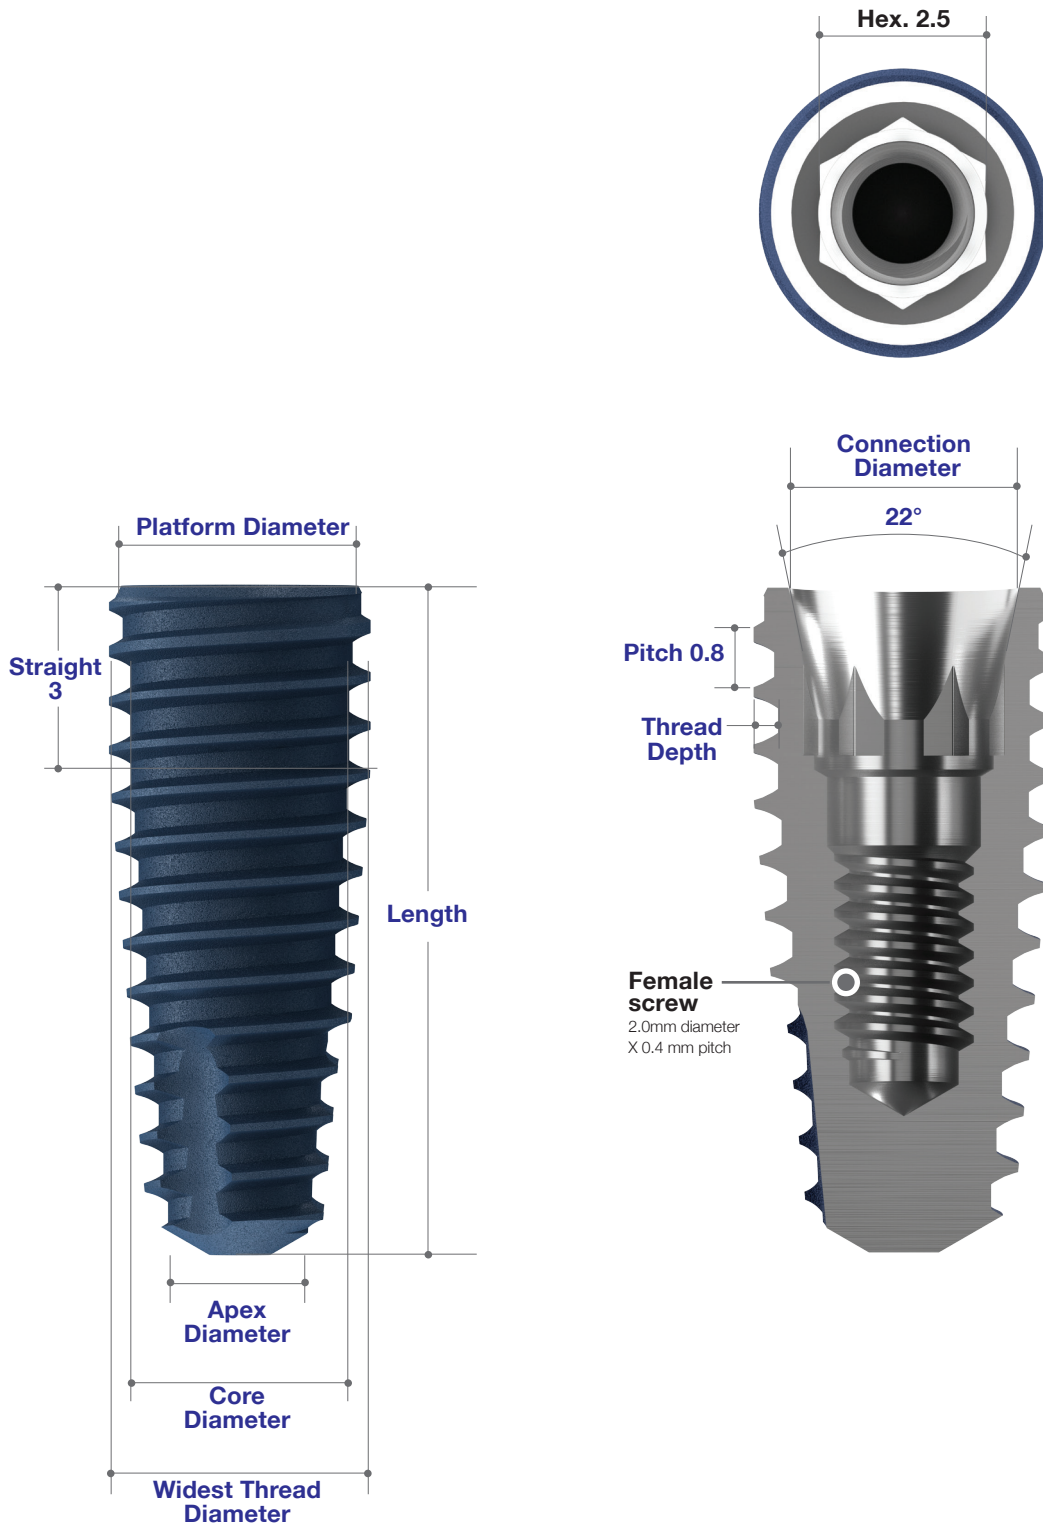

## Fixture Size Variation

### • Regular Thread

| Fixture Diameter | Widest thread Diameter | Platform Diameter | Apex Diameter | Core Diameter (Thread Depth) | Length(mm)                           | Connection Diameter |
|------------------|------------------------|-------------------|---------------|------------------------------|--------------------------------------|---------------------|
| Ø3.5             | Ø3.9                   | Ø3.5              | Ø2.6          | Ø3.4(0.25)                   | 7.0 / 8.0 / 9.5 / 11.0 / 12.5 / 14.5 | Ø3.1                |
| Ø4.0             | Ø4.3                   | Ø3.9              | Ø3.0          | Ø3.6(0.35)                   | 7.0 / 8.0 / 9.5 / 11.0 / 12.5 / 14.5 | Ø3.3                |
| Ø4.5             | Ø4.8                   | Ø3.9              | Ø3.5          | Ø4.1(0.35)                   | 7.0 / 8.0 / 9.5 / 11.0 / 12.5 / 14.5 | Ø3.3                |
| Ø5.0             | Ø5.3                   | Ø3.9              | Ø3.6          | Ø4.6(0.35)                   | 7.0 / 8.0 / 9.5 / 11.0 / 12.5 / 14.5 | Ø3.3                |
| Ø6.0             | Ø6.3                   | Ø3.9              | Ø4.6          | Ø5.6(0.35)                   | 7.0 / 8.0 / 9.5 / 11.0 / 12.5        | Ø3.3                |
| Ø7.0             | Ø7.3                   | Ø3.9              | Ø5.7          | Ø6.6(0.35)                   | 7.0 / 8.0 / 9.5 / 11.0 / 12.5        | Ø3.3                |

• (Excluding length 7 & 8.5)

### • Deep Thread

| Fixture Diameter | Widest thread Diameter | Platform Diameter | Apex Diameter | Core Diameter (Thread Depth) | Length(mm)                           | Connection Diameter |
|------------------|------------------------|-------------------|---------------|------------------------------|--------------------------------------|---------------------|
| Ø4.5             | Ø4.8                   | Ø3.9              | Ø3.5          | Ø3.6(0.6)                    | 7.0 / 8.0 / 9.5 / 11.0 / 12.5 / 14.5 | Ø3.3                |
| Ø5.5             | Ø5.8                   | Ø3.9              | Ø4.1          | Ø4.6(0.6)                    | 7.0 / 8.0 / 9.5 / 11.0 / 12.5 / 14.5 | Ø3.3                |
| Ø6.5             | Ø6.8                   | Ø3.9              | Ø5.1          | Ø5.6(0.6)                    | 7.0 / 8.0 / 9.5 / 11.0 / 12.5 / 14.5 | Ø3.3                |
| Ø7.5             | Ø7.8                   | Ø3.9              | Ø6.2          | Ø6.6(0.6)                    | 7.0 / 8.0 / 9.5 / 11.0 / 12.5 / 14.5 | Ø3.3                |
| Ø8.0             | Ø8.3                   | Ø3.9              | Ø6.7          | Ø6.6(0.85)                   | 7.0 / 8.0 / 9.5 / 11.0 / 12.5        | Ø3.3                |

• (Excluding length 7 & 8.5)

### • Special 7mm


| Fixture Diameter | Widest thread Diameter | Platform Diameter | Apex Diameter | Core Diameter (Thread Depth) | Length(mm) (Bevel H) | Connection Diameter |
|------------------|------------------------|-------------------|---------------|------------------------------|----------------------|---------------------|
| Ø4.5             | Ø4.8                   | Ø3.9              | Ø3.5          | Ø4.1(0.35)                   | 7(2)                 | Ø3.3                |
| Ø5.0             | Ø5.3                   | Ø3.9              | Ø3.6          | Ø4.6(0.35)                   | 7(2)                 | Ø3.3                |
| Ø6.0             | Ø6.3                   | Ø3.9              | Ø4.6          | Ø5.6(0.35)                   | 7(2)                 | Ø3.3                |
| Ø7.0             | Ø7.3                   | Ø3.9              | Ø5.7          | Ø6.6(0.35)                   | 7(2)                 | Ø3.3                |

# II. Fixture Size

## Regular Thread Ø3.5

- Cover Screw(cs) included


| Diameter | Length(mm) | Ref.C   |
|----------|------------|---------|
| Ø3.5     | 7.0        | IF3507C |
|          | 8.5        | IF3508C |
|          | 10.0       | IF3510C |
|          | 11.5       | IF3511C |
|          | 13.0       | IF3513C |
|          | 15.0       | IF3515C |



## Regular Thread Ø4.0

- Cover Screw(cs) included

| Diameter | Length(mm) | Ref.C   |
|----------|------------|---------|
| Ø4.0     | 7.0        | IF4007C |
|          | 8.5        | IF4008C |
|          | 10.0       | IF4010C |
|          | 11.5       | IF4011C |
|          | 13.0       | IF4013C |
|          | 15.0       | IF4015C |



## Regular Thread Ø4.5

- Cover Screw(cs) included

| Diameter | Length(mm) | Ref.C   |
|----------|------------|---------|
| Ø4.5     | 7.0        | IF4507C |
|          | 8.5        | IF4508C |
|          | 10.0       | IF4510C |
|          | 11.5       | IF4511C |
|          | 13.0       | IF4513C |
|          | 15.0       | IF4515C |



## Regular Thread Ø5.0

- Cover Screw(cs) included

| Diameter | Length(mm) | Ref.C   |
|----------|------------|---------|
| Ø5.0     | 7.0        | IF5007C |
|          | 8.5        | IF5008C |
|          | 10.0       | IF5010C |
|          | 11.5       | IF5011C |
|          | 13.0       | IF5013C |
|          | 15.0       | IF5015C |






## Regular Thread Ø6.0

- Cover Screw(cs) included

| Diameter | Length(mm) | Ref.C   |
|----------|------------|---------|
| Ø6.0     | 7.0        | IF6007C |
|          | 8.5        | IF6008C |
|          | 10.0       | IF6010C |
|          | 11.5       | IF6011C |
|          | 13.0       | IF6013C |



## Regular Thread Ø7.0

- Cover Screw(cs) included

| Diameter | Length(mm) | Ref.C   |
|----------|------------|---------|
| Ø7.0     | 7.0        | IF7007C |
|          | 8.5        | IF7008C |
|          | 10.0       | IF7010C |
|          | 11.5       | IF7011C |
|          | 13.0       | IF7013C |



## Deep Thread Ø4.5

- Cover Screw(cs) included


| Diameter | Length(mm) | Ref.C    |
|----------|------------|----------|
| Ø4.5     | 7.0        | IF4507DC |
|          | 8.5        | IF4508DC |
|          | 10.0       | IF4510DC |
|          | 11.5       | IF4511DC |
|          | 13.0       | IF4513DC |
|          | 15.0       | IF4515DC |



## Deep Thread Ø5.5

- Cover Screw(cs) included

| Diameter | Length(mm) | Ref.C    |
|----------|------------|----------|
| Ø5.5     | 7.0        | IF5507DC |
|          | 8.5        | IF5508DC |
|          | 10.0       | IF5510DC |
|          | 11.5       | IF5511DC |
|          | 13.0       | IF5513DC |
|          | 15.0       | IF5515DC |




## ➔ Fixture Size

### Deep Thread Ø6.5

- Cover Screw(cs) included


| Diameter | Length(mm) | Ref.C    |
|----------|------------|----------|
| Ø6.5     | 7.0        | IF6507DC |
|          | 8.5        | IF6508DC |
|          | 10.0       | IF6510DC |
|          | 11.5       | IF6511DC |
|          | 13.0       | IF6513DC |
|          | 15.0       | IF6515DC |



### Deep Thread Ø7.5

- Cover Screw(cs) included


| Diameter | Length(mm) | Ref.C    |
|----------|------------|----------|
| Ø7.5     | 7.0        | IF7507DC |
|          | 8.5        | IF7508DC |
|          | 10.0       | IF7510DC |
|          | 11.5       | IF7511DC |
|          | 13.0       | IF7513DC |
|          | 15.0       | IF7515DC |



### Deep Thread Ø8.0

- Cover Screw(cs) included


| Diameter | Length(mm) | Ref.C    |
|----------|------------|----------|
| Ø8.0     | 7.0        | IF8007DC |
|          | 8.5        | IF8008DC |
|          | 10.0       | IF8010DC |
|          | 11.5       | IF8011DC |
|          | 13.0       | IF8013DC |



### Special Length

- Cover Screw(cs) included

| Diameter(mm) | Length(mm) | Ref.C    |
|--------------|------------|----------|
| Ø4.5         | 7.0        | IF4507SC |
| Ø5.0         |            | IF5007SC |
| Ø6.0         |            | IF6007SC |
| Ø7.0         |            | IF7007SC |

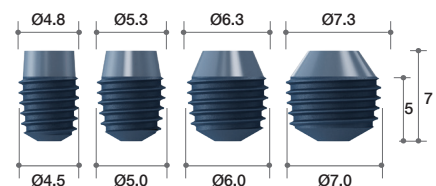

# Cover Screw & Healing Abutment

## Cover Screw

- Used for two stage surgical protocol.
- Protects the inner portion and platform of the fixture after placing.
- Uses Hand Driver (1.2 Hex).
- Recommend torque : by hand (5 - 8Ncm)
- Aoucs5005-Used for Ø3.5/Ø4.0/Ø4.5 fixture
- Aoucs6005-Used for Ø5.0 fixture

| Profile Diameter | Height (mm) | Color   | Ref.C     |
|------------------|-------------|---------|-----------|
| Ø3.5             | 0.5         | Magenta | CS        |
| Ø3.7             | 1.0         | Magenta | CS1       |
| Ø4.1             | 2.0         | Magenta | CS2       |
| Ø5.0             | 0.5         | Gold    | AOUCS5005 |
| Ø6.0             | 0.5         | Magenta | AOUCS6005 |



## Healing Abutment

- Creates the emergence profile of the gingival tissue during healing.
- Uses Hand Driver (1.2 Hex).
- Recommend torque : by hand (5 - 8Ncm)



| Diameter(mm) | Height(mm) | Ref.C  |
|--------------|------------|--------|
| Ø4.0         | 2.5        | HA4025 |
|              | 3.0        | HA4030 |
|              | 4.0        | HA4040 |
|              | 5.0        | HA4050 |
|              | 6.0        | HA4060 |
|              | 7.0        | HA4070 |
|              | 8.0        | HA4080 |
|              | 9.0        | HA4090 |
| Ø4.5         | 2.5        | HA4525 |
|              | 3.0        | HA4530 |
|              | 4.0        | HA4540 |
|              | 5.0        | HA4550 |
|              | 6.0        | HA4560 |
|              | 7.0        | HA4570 |
|              | 8.0        | HA4580 |
|              | 9.0        | HA4590 |
| Ø5.5         | 3.0        | HA5530 |
|              | 4.0        | HA5540 |
|              | 5.0        | HA5550 |
|              | 6.0        | HA5560 |
|              | 7.0        | HA5570 |
|              | 8.0        | HA5580 |
| Ø5.0         | 9.0        | HA5590 |

| Diameter(mm) | Height(mm) | Ref.C  |
|--------------|------------|--------|
| Ø6.5         | 3.0        | HA6530 |
|              | 4.0        | HA6540 |
|              | 5.0        | HA6550 |
|              | 6.0        | HA6560 |
|              | 7.0        | HA6570 |
|              | 8.0        | HA6580 |
|              | 9.0        | HA6590 |
| Ø7.5         | 4.0        | HA7540 |
|              | 5.0        | HA7550 |
|              | 6.0        | HA7560 |
|              | 7.0        | HA7570 |
|              | 8.0        | HA7580 |
|              | 9.0        | HA7590 |
| Ø8.5         | 4.0        | HA8540 |
|              | 5.0        | HA8550 |
|              | 6.0        | HA8560 |
|              | 7.0        | HA8570 |
|              | 8.0        | HA8580 |
| Ø9.5         | 9.0        | HA8590 |
|              | 4.0        | HA9540 |
|              | 5.0        | HA9550 |
|              | 6.0        | HA9560 |
|              | 7.0        | HA9570 |
|              | 8.0        | HA9580 |
| Ø9.0         | 9.0        | HA9590 |



## Healing Abutment

### (Anatomic type)

- Use with a Hand Driver(1.2 Hex).
- Abutment Screw included.H=4 AOHAS2004/ H=5 AOHAS2005/ H=7 AOHAS2007
- Used for non-submerged type surgery or for two stage surgery.
- Choose appropriate diameter and height of Healing Abutment according to situation.
- Helps to form suitable emergence profile during period of gingival healing.
- Recommend torque : by hand (5 - 8Ncm)

| Type    | MD (mm) | LL (mm) | Height (mm) | Connection | Ref.C      |            |            |             |
|---------|---------|---------|-------------|------------|------------|------------|------------|-------------|
| Incisor | 4.0     | 5.0     | 4           | Hex        | AOHI40504T |            |            |             |
|         |         |         | 5           |            | AOHI40505T |            |            |             |
|         |         |         | 7           |            | AOHI40507T |            |            |             |
|         | 4.5     | 4.5     | 4           |            | Hex        | AOHI45454T |            |             |
|         |         |         | 5           |            |            | AOHI45455T |            |             |
|         |         |         | 7           |            |            | AOHI45457T |            |             |
|         | 6.0     | 5.0     | 4           |            |            | Hex        | AOHI60504T |             |
|         |         |         | 5           |            |            |            | AOHI60505T |             |
|         |         |         | 7           |            |            |            | AOHI60507T |             |
|         | 7.0     | 6.0     | 4           | Hex        |            |            | AOHI70604T |             |
|         |         |         | 5           |            |            |            | AOHI70605T |             |
|         |         |         | 7           |            |            |            | AOHI70607T |             |
|         | Incisor | 4.0     | 5.0         |            | 4          |            | Non-Hex    | AOHI40504NT |
|         |         |         |             |            | 5          |            |            | AOHI40505NT |
|         |         |         |             |            | 7          |            |            | AOHI40507NT |
|         |         | 4.5     | 4.5         |            | 4          | Non-Hex    |            | AOHI45454NT |
|         |         |         |             |            | 5          |            |            | AOHI45455NT |
|         |         |         |             |            | 7          |            |            | AOHI45457NT |
|         |         | 6.0     | 5.0         | 4          | Non-Hex    |            |            | AOHI60504NT |
|         |         |         |             | 5          |            |            |            | AOHI60505NT |
|         |         |         |             | 7          |            |            |            | AOHI60507NT |
| 7.0     |         | 6.0     | 4           | Non-Hex    |            |            |            | AOHI70604NT |
|         |         |         | 5           |            |            |            |            | AOHI70605NT |
|         |         |         | 7           |            |            |            |            | AOHI70607NT |



| Type   | MD (mm) | LB (mm) | Height (mm) | Connection | Ref.C       |
|--------|---------|---------|-------------|------------|-------------|
| Canine | 5.0     | 6.5     | 4           | Hex        | AOHC50654T  |
|        |         |         | 5           |            | AOHC50655T  |
|        |         |         | 7           |            | AOHC50657T  |
|        | 5.0     | 6.5     | 4           | Non-Hex    | AOHC50654NT |
|        |         |         | 5           |            | AOHC50655NT |
|        |         |         | 7           |            | AOHC50657NT |



| Type      | MD (mm) | LB (mm) | Height (mm) | Connection | Ref.C      |             |
|-----------|---------|---------|-------------|------------|------------|-------------|
| Pre-Molar | 4.5     | 6.0     | 4           | Hex        | AOHM45604T |             |
|           |         |         | 5           |            | AOHM45605T |             |
|           |         |         | 7           |            | AOHM45607T |             |
|           | 5.0     | 7.0     | 4           |            | Hex        | AOHM50704T  |
|           |         |         | 5           |            |            | AOHM50705T  |
|           |         |         | 7           |            |            | AOHM50707T  |
|           | 4.5     | 6.0     | 4           | Non-Hex    |            | AOHM45604NT |
|           |         |         | 5           |            |            | AOHM45605NT |
|           |         |         | 7           |            |            | AOHM45607NT |
|           | 5.0     | 7.0     | 4           |            | Non-Hex    | AOHM50704NT |
|           |         |         | 5           |            |            | AOHM50705NT |
|           |         |         | 7           |            |            | AOHM50707NT |




| Type  | MD (mm) | LB (mm) | Height (mm) | Connection | Ref.C      |             |
|-------|---------|---------|-------------|------------|------------|-------------|
| Molar | 6.0     | 7.0     | 4           | Hex        | AOHM60704T |             |
|       |         |         | 5           |            | AOHM60705T |             |
|       |         |         | 7           |            | AOHM60707T |             |
|       | 6.0     | 8.0     | 4           |            | AOHM60804T |             |
|       |         |         | 5           |            | AOHM60805T |             |
|       |         |         | 7           |            | AOHM60807T |             |
|       | 6.0     | 9.0     | 4           |            | AOHM60904T |             |
|       |         |         | 5           |            | AOHM60905T |             |
|       |         |         | 7           |            | AOHM60907T |             |
|       | 7.0     | 8.0     | 4           |            | AOHM70804T |             |
|       |         |         | 5           |            | AOHM70805T |             |
|       |         |         | 7           |            | AOHM70807T |             |
|       | 7.0     | 9.0     | 4           |            | AOHM70904T |             |
|       |         |         | 5           |            | AOHM70905T |             |
|       |         |         | 7           |            | AOHM70907T |             |
|       | 7.0     | 10.0    | 4           |            | AOHM70104T |             |
|       |         |         | 5           |            | AOHM70105T |             |
|       |         |         | 7           |            | AOHM70107T |             |
|       | 8.0     | 9.0     | 4           |            | AOHM80904T |             |
|       |         |         | 5           |            | AOHM80905T |             |
|       |         |         | 7           |            | AOHM80907T |             |
|       | 8.0     | 10.0    | 4           |            | AOHM80104T |             |
|       |         |         | 5           |            | AOHM80105T |             |
|       |         |         | 7           |            | AOHM80107T |             |
|       | 6.0     | 7.0     | 4           |            | Non-Hex    | AOHM60704NT |
|       |         |         | 5           |            |            | AOHM60705NT |
|       |         |         | 7           |            |            | AOHM60707NT |
|       | 6.0     | 8.0     | 4           |            |            | AOHM60804NT |
|       |         |         | 5           |            |            | AOHM60805NT |
|       |         |         | 7           |            |            | AOHM60807NT |
|       | 6.0     | 9.0     | 4           |            |            | AOHM60904NT |
|       |         |         | 5           |            |            | AOHM60905NT |
|       |         |         | 7           |            |            | AOHM60907NT |
|       | 7.0     | 8.0     | 4           |            |            | AOHM70804NT |
|       |         |         | 5           |            |            | AOHM70805NT |
|       |         |         | 7           |            |            | AOHM70807NT |
|       | 7.0     | 9.0     | 4           |            |            | AOHM70904NT |
|       |         |         | 5           |            |            | AOHM70905NT |
|       |         |         | 7           |            |            | AOHM70907NT |
|       | 7.0     | 10.0    | 4           |            |            | AOHM70104NT |
|       |         |         | 5           |            |            | AOHM70105NT |
|       |         |         | 7           |            |            | AOHM70107NT |
|       | 8.0     | 9.0     | 4           |            |            | AOHM80904NT |
|       |         |         | 5           |            |            | AOHM80905NT |
|       |         |         | 7           |            |            | AOHM80907NT |
|       | 8.0     | 10.0    | 4           |            |            | AOHM80104NT |
|       |         |         | 5           |            |            | AOHM80105NT |
|       |         |         | 7           |            |            | AOHM80107NT |



| Type    | MD (mm) | LB (mm) | Height (mm) | Connection  | Ref.C      |         |             |
|---------|---------|---------|-------------|-------------|------------|---------|-------------|
| Special | 4.5     | 6.0     | 4           | Hex         | AOHS45604T |         |             |
|         |         |         | 5           |             | AOHS45605T |         |             |
|         |         |         | 7           |             | AOHS45607T |         |             |
|         | 5.0     | 6.5     | 4           |             | AOHS50654T |         |             |
|         |         |         | 5           |             | AOHS50655T |         |             |
|         |         |         | 7           |             | AOHS50657T |         |             |
|         | 5.0     | 7.0     | 4           |             | AOHS50704T |         |             |
|         |         |         | 5           |             | AOHS50705T |         |             |
|         |         |         | 7           |             | AOHS50707T |         |             |
|         | 6.0     | 7.0     | 4           |             | AOHS60704T |         |             |
|         |         |         | 5           |             | AOHS60705T |         |             |
|         |         |         | 7           |             | AOHS60707T |         |             |
|         | 6.0     | 8.0     | 4           |             | AOHS60804T |         |             |
|         |         |         | 5           |             | AOHS60805T |         |             |
|         |         |         | 7           |             | AOHS60807T |         |             |
|         | 6.0     | 9.0     | 4           |             | AOHS60904T |         |             |
|         |         |         | 5           |             | AOHS60905T |         |             |
|         |         |         | 7           |             | AOHS60907T |         |             |
|         | 7.0     | 8.0     | 4           |             | AOHS70804T |         |             |
|         |         |         | 5           |             | AOHS70805T |         |             |
|         |         |         | 7           |             | AOHS70807T |         |             |
|         | 7.0     | 9.0     | 4           |             | AOHS70904T |         |             |
|         |         |         | 5           |             | AOHS70905T |         |             |
|         |         |         | 7           |             | AOHS70907T |         |             |
|         | 7.0     | 10.0    | 4           |             | AOHS70104T |         |             |
|         |         |         | 5           |             | AOHS70105T |         |             |
|         |         |         | 7           |             | AOHS70107T |         |             |
|         | 8.0     | 9.0     | 4           |             | AOHS80904T |         |             |
|         |         |         | 5           |             | AOHS80905T |         |             |
|         |         |         | 7           |             | AOHS80907T |         |             |
|         | 8.0     | 10.0    | 4           |             | AOHS80104T |         |             |
|         |         |         | 5           |             | AOHS80105T |         |             |
|         |         |         | 7           |             | AOHS80107T |         |             |
|         | Special | 4.5     | 6.0         |             | 4          | Non-Hex | AOHS45604NT |
|         |         |         |             |             | 5          |         | AOHS45605NT |
|         |         |         |             |             | 7          |         | AOHS45607NT |
|         |         | 5.0     | 6.5         |             | 4          |         | AOHS50654NT |
|         |         |         |             |             | 5          |         | AOHS50655NT |
|         |         |         |             |             | 7          |         | AOHS50657NT |
|         |         | 5.0     | 7.0         |             | 4          |         | AOHS50704NT |
|         |         |         |             |             | 5          |         | AOHS50705NT |
|         |         |         |             |             | 7          |         | AOHS50707NT |
|         |         | 6.0     | 7.0         |             | 4          |         | AOHS60704NT |
|         |         |         |             |             | 5          |         | AOHS60705NT |
|         |         |         |             |             | 7          |         | AOHS60707NT |
|         |         | 6.0     | 8.0         |             | 4          |         | AOHS60804NT |
|         |         |         |             |             | 5          |         | AOHS60805NT |
|         |         |         |             |             | 7          |         | AOHS60807NT |
| 6.0     |         | 9.0     | 4           | AOHS60904NT |            |         |             |
|         |         |         | 5           | AOHS60905NT |            |         |             |
|         |         |         | 7           | AOHS60907NT |            |         |             |
| 7.0     |         | 8.0     | 4           | AOHS70804NT |            |         |             |
|         |         |         | 5           | AOHS70805NT |            |         |             |
|         |         |         | 7           | AOHS70807NT |            |         |             |
| 7.0     |         | 9.0     | 4           | AOHS70904NT |            |         |             |
|         |         |         | 5           | AOHS70905NT |            |         |             |
|         |         |         | 7           | AOHS70907NT |            |         |             |
| 7.0     |         | 10.0    | 4           | AOHS70104NT |            |         |             |
|         |         |         | 5           | AOHS70105NT |            |         |             |
|         |         |         | 7           | AOHS70107NT |            |         |             |
| 8.0     |         | 9.0     | 4           | AOHS80904NT |            |         |             |
|         |         |         | 5           | AOHS80905NT |            |         |             |
|         |         |         | 7           | AOHS80907NT |            |         |             |
| 8.0     |         | 10.0    | 4           | AOHS80104NT |            |         |             |
|         |         |         | 5           | AOHS80105NT |            |         |             |
|         |         |         | 7           | AOHS80107NT |            |         |             |

# Abutment & Prosthetic Options

## I. Fixture Level Prosthesis

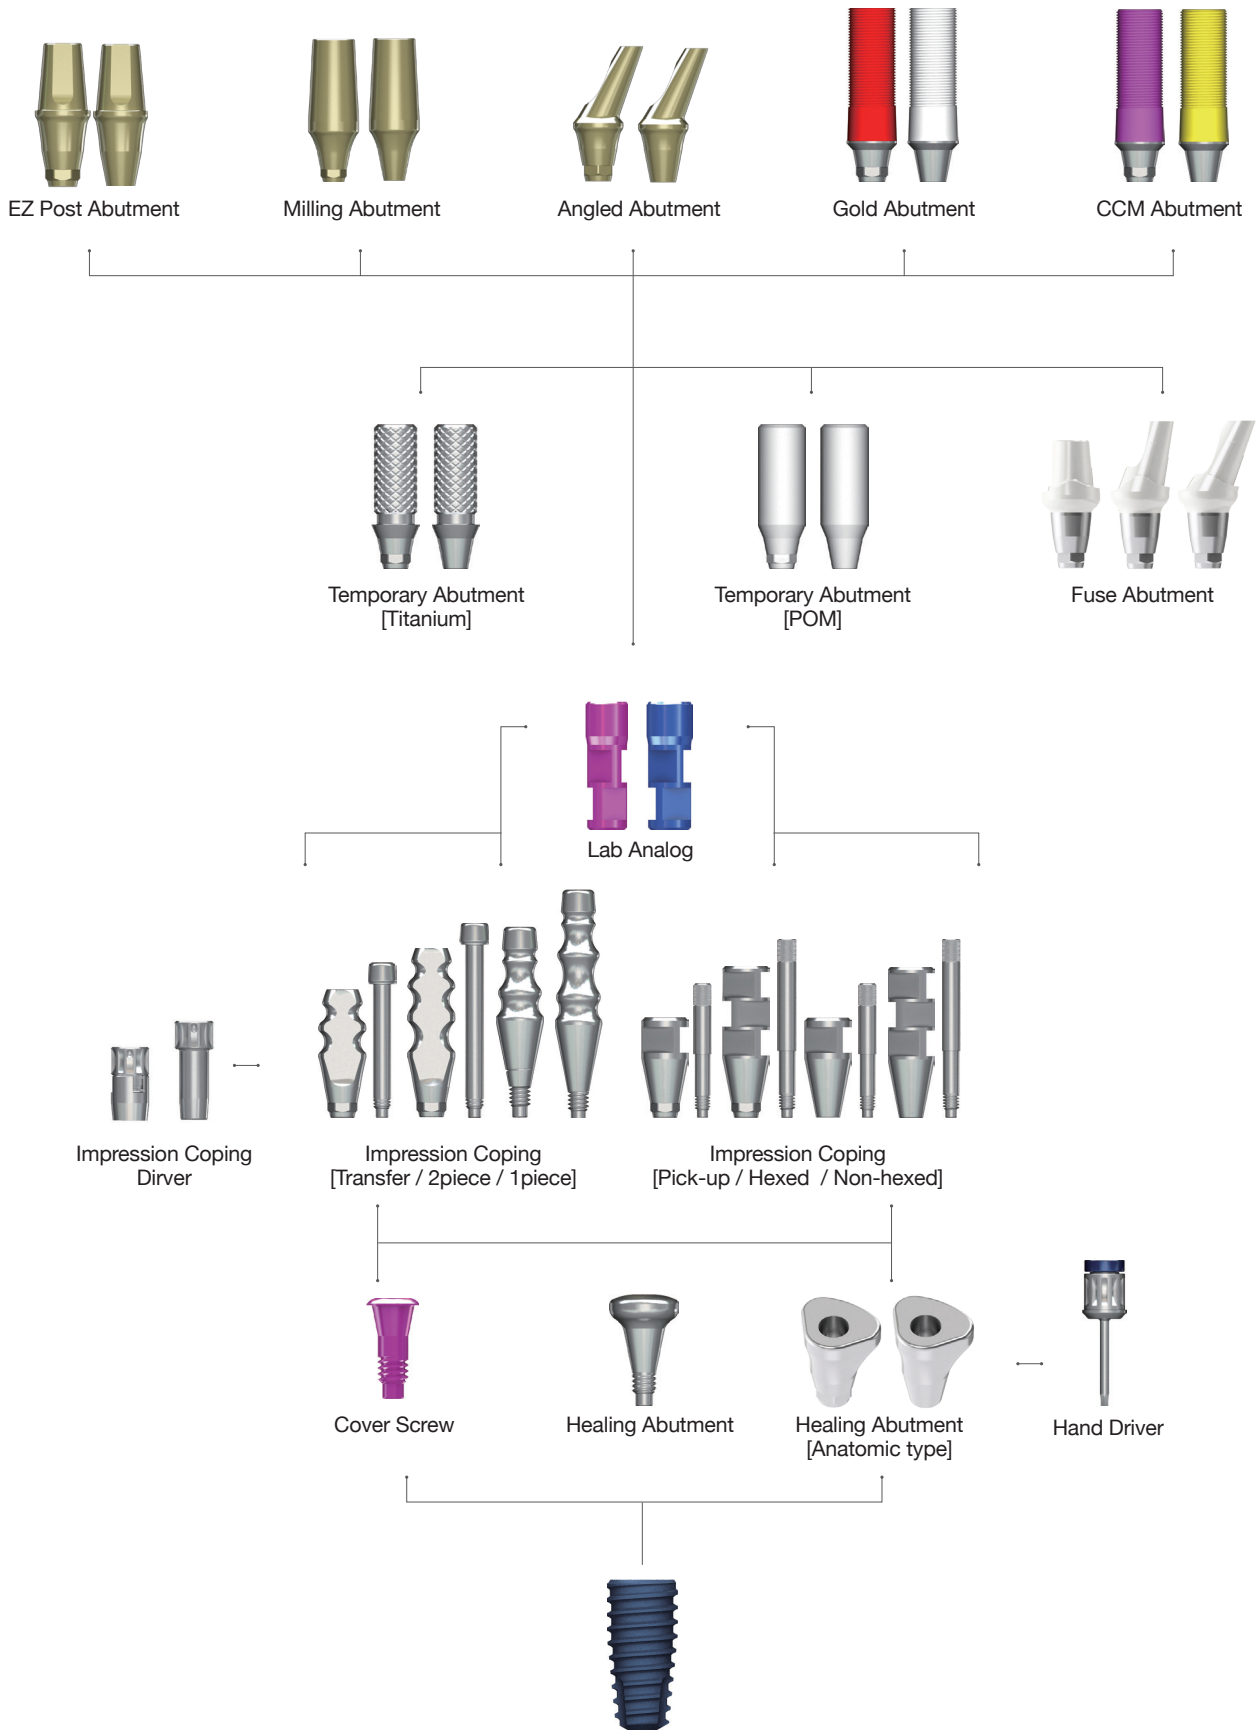


## ➔ Abutment Options (Continued)

### Impression Coping (Transfer Type)

- Guide Pin (GPT12H / GPT12 / GPT16H / GPT16) included in two piece type

- Diameters correspond to Healing Abutment diameters.
- Available in one piece (non-hex) or two piece (hex) and two heights.
- Used for Closed Tray (Transfer) technique.
- Impression Coping design ensures easy and accurate transfer of fixture position.
- Flat surface of Impression Coping aligns with the flat of the hex within the fixture.
- Impression Coping Driver and Hand Driver (1.2Hex) should be used to ensure Impression Coping is properly tightened.

| Profile Diameter | Height (mm) | Type    | Ref.C    | Ref.C (1.2 Hex) |          |
|------------------|-------------|---------|----------|-----------------|----------|
| Ø4.0             | 12.0        | 2piece  | IT4012HT | IT4012HHT       |          |
|                  | 16.0        |         | IT4016HT | IT4016HHT       |          |
| Ø4.5             | 12.0        |         | IT4512HT | IT4512HHT       |          |
|                  | 16.0        |         | IT4516HT | IT4516HHT       |          |
| Ø5.5             | 12.0        |         | IT5512HT | IT5512HHT       |          |
|                  | 16.0        |         | IT5516HT | IT5516HHT       |          |
| Ø6.5             | 12.0        |         | IT6512HT | IT6512HHT       |          |
|                  | 16.0        |         | IT6516HT | IT6516HHT       |          |
| Ø4.0             | 12.0        |         | 1piece   | IT4012N         | IT4012NH |
|                  | 16.0        |         |          | IT4016N         | IT4016NH |
| Ø4.5             | 12.0        |         |          | IT4512N         | IT4512NH |
|                  | 16.0        |         |          | IT4516N         | IT4516NH |
| Ø5.5             | 12.0        | IT5512N |          | IT5512NH        |          |
|                  | 16.0        | IT5516N |          | IT5516NH        |          |
| Ø6.5             | 12.0        | IT6512N |          | IT6512NH        |          |
|                  | 16.0        | IT6516N |          | IT6516NH        |          |

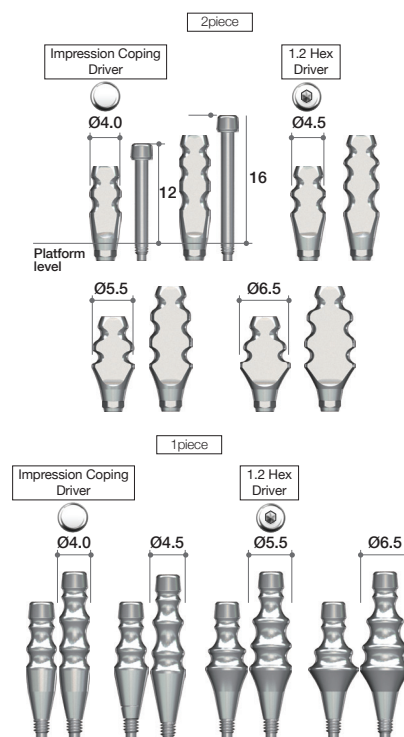


### Impression Coping (Pick-up type)

- Guide Pin (GPP07 / GPP12 / GPP16) included

- Used for open tray technique. Most beneficial for multiple fixtures that will be splinted together.
- Square body design ensures stability within the impression and accurate transfer of fixture position.

| Profile Diameter | Height(mm) | Type     | Ref.C    |          |
|------------------|------------|----------|----------|----------|
| Ø4.0             | 12.0       | Hex      | IP4012HT |          |
|                  | 16.0       |          | IP4016HT |          |
| Ø4.5             | 7.0        |          | IP4507HT |          |
|                  | 12.0       |          | IP4512HT |          |
| Ø5.5             | 7.0        |          | IP5507HT |          |
|                  | 12.0       |          | IP5512HT |          |
| Ø6.5             | 7.0        |          | IP6507HT |          |
|                  | 12.0       |          | IP6512HT |          |
| Ø4.0             | 12.0       |          | Non-Hex  | IP4012NT |
|                  | 16.0       |          |          | IP4016NT |
| Ø4.5             | 7.0        |          |          | IP4507NT |
|                  | 12.0       |          |          | IP4512NT |
| Ø5.5             | 7.0        | IP5507NT |          |          |
|                  | 12.0       | IP5512NT |          |          |
| Ø6.5             | 7.0        | IP6507NT |          |          |
|                  | 12.0       | IP6512NT |          |          |

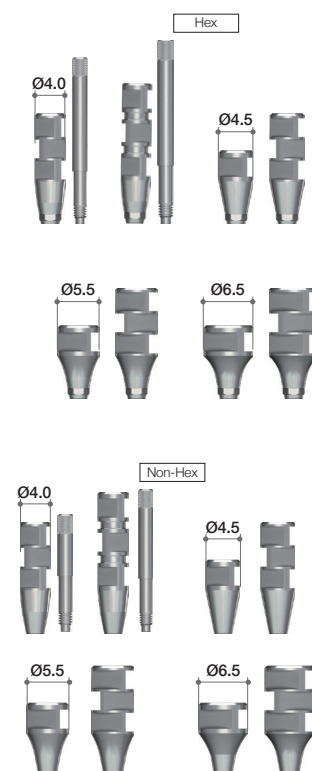

## ➔ Abutment Options (Continued)

### Lab Analog

- Replicates the fixture.
- Magenta analog for Ø3.5 fixture.
- Blue analog for all fixture sizes for Ø4.0~Ø8.0.


| Type           | Color   | Ref.C  |
|----------------|---------|--------|
| Small          | Magenta | LA350H |
| Regular & Wide | Blue    | LA400H |



### Temporary Abutment (Titanium)

- Abutment Screw(AS20) included
- For making provisional restoration.
- Available in both hex and non-hex.
- Grooved surface on abutment post allows for better retention of resin or wax.
- Recommend torque : 25Ncm


| Profile Diameter | Cuff Height (mm) | Type    | Ref.C    |
|------------------|------------------|---------|----------|
| Ø4.5             | 1.5              | Hex     | TA4511HT |
|                  |                  | Non-Hex | TA4511NT |



### Temporary Abutment (POM)

- Abutment Screw(AS20) included
- For making chairside provisionals for the aesthetic zone.
- Especially useful for immediate placement after extraction.
- Available in both hex and non-hex.
- Recommend torque : 25Ncm

| Profile Diameter | Cuff Height (mm) | Type    | Ref.C     |
|------------------|------------------|---------|-----------|
| Ø4.5             | 11.0             | Hex     | TA4511HPT |
|                  |                  | Non-Hex | TA4511NPT |




### Fuse Abutment

- Abutment Screw(AS20)+Fuse cap included.
- Recommend torque : 25Ncm

| Diameter | Cuff Height (mm) | Post Height (mm) | Type     | Ref.C      |               |              |   |     |            |
|----------|------------------|------------------|----------|------------|---------------|--------------|---|-----|------------|
|          |                  |                  |          |            | Labio-lingual | Mesio-distal |   |     |            |
| Ø5.5     | 4                | 5.5              | Straight | AOFAP5545P | Labio-lingual | Mesio-distal |   |     |            |
|          |                  |                  |          |            |               |              | 7 | 15° | AOFAA5415P |
|          |                  |                  |          |            |               |              |   |     |            |

NEW : 4mm cuff height available  
 → Adequate for deeply placed implants or thick gingival cases

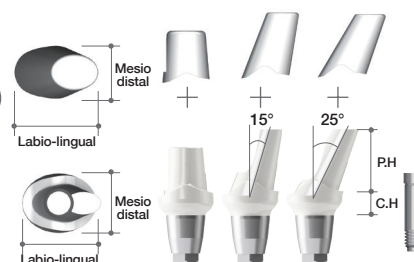



## EZ Post Abutment

- Abutment Screw(AS20) included

- Cement retained restoration
- Post Height : 4.0, 5.5mm
- Profile Diameter : Ø4.5, Ø5.5, Ø6.5
- Cuff Height : 1.5, 2.5, 3.5, 4.5, 5.5mm
- Cement retained restoration
- Anodizing to ensure excellent aesthetics under the tissue. Biological S-line provides a seamless natural-looking and more functional emergence profile.
- Post Height : 4.0, 5.5mm
- Non-Hex Abutments do not provide anti-rotation and are contra-indicated for single unit restorations.
- Recommend torque : 35Ncm




| Profile Diameter | Cuff Height(mm) | Post Height(mm) | Type     | Ref.C    |
|------------------|-----------------|-----------------|----------|----------|
| Ø4.5             | 1.0             | 4.0             | Hex      | EP4511HT |
|                  | 1.5             |                 |          | EP4514HT |
|                  | 2.5             |                 |          | EP4524HT |
|                  | 3.5             |                 |          | EP4534HT |
|                  | 4.5             |                 |          | EP4544HT |
|                  | 5.5             |                 |          | EP4554HT |
|                  | 1.0             | 5.5             |          | EP4510HT |
|                  | 1.5             |                 |          | EP4515HT |
|                  | 2.5             |                 |          | EP4525HT |
|                  | 3.5             |                 |          | EP4535HT |
|                  | 4.5             |                 |          | EP4545HT |
|                  | 5.5             |                 |          | EP4555HT |
|                  | 1.5             | 7.0             |          | EP4517HT |
|                  | 2.5             |                 |          | EP4527HT |
|                  | 3.5             |                 |          | EP4537HT |
| 4.5              | EP4547HT        |                 |          |          |
| 5.5              | EP4557HT        |                 |          |          |
| Ø5.5             | 1.5             |                 | 4.0      | Hex      |
|                  | 2.5             | EP5524HT        |          |          |
|                  | 3.5             | EP5534HT        |          |          |
|                  | 4.5             | EP5544HT        |          |          |
|                  | 5.5             | EP5554HT        |          |          |
|                  | 1.5             | 5.5             |          |          |
|                  | 2.5             |                 | EP5525HT |          |
|                  | 3.5             |                 | EP5535HT |          |
|                  | 4.5             |                 | EP5545HT |          |
|                  | 5.5             |                 | EP5555HT |          |
|                  | 1.5             |                 | 7.0      |          |
|                  | 2.5             | EP5527HT        |          |          |
|                  | 3.5             | EP5537HT        |          |          |
|                  | 4.5             | EP5547HT        |          |          |
|                  | 5.5             | EP5557HT        |          |          |
| Ø6.5             | 1.5             | 4.0             |          | Hex      |
|                  | 2.5             |                 | EP6524HT |          |
|                  | 3.5             |                 | EP6534HT |          |
|                  | 4.5             |                 | EP6544HT |          |
|                  | 5.5             |                 | EP6554HT |          |
|                  | 1.5             |                 | 5.5      |          |
|                  | 2.5             | EP6525HT        |          |          |
|                  | 3.5             | EP6535HT        |          |          |
|                  | 4.5             | EP6545HT        |          |          |
|                  | 5.5             | EP6555HT        |          |          |
|                  | 1.5             | 7.0             |          |          |
|                  | 2.5             |                 | EP6527HT |          |
|                  | 3.5             |                 | EP6537HT |          |
|                  | 4.5             |                 | EP6547HT |          |
|                  | 5.5             |                 | EP6557HT |          |
| Ø4.5             | 1.0             |                 | 4.0      | Non-Hex  |
|                  | 1.5             | EP4514NT        |          |          |
|                  | 2.5             | EP4524NT        |          |          |
|                  | 3.5             | EP4534NT        |          |          |
|                  | 4.5             | EP4544NT        |          |          |
|                  | 5.5             | EP4554NT        |          |          |
|                  | 1.0             | 5.5             | EP4510NT |          |
|                  | 1.5             |                 | EP4515NT |          |
|                  | 2.5             |                 | EP4525NT |          |
|                  | 3.5             |                 | EP4535NT |          |
|                  | 4.5             |                 | EP4545NT |          |
|                  | 5.5             |                 | EP4555NT |          |
|                  | 1.5             | 7.0             | EP4517NT |          |
|                  | 2.5             |                 | EP4527NT |          |
|                  | 3.5             |                 | EP4537NT |          |
| 4.5              | EP4547NT        |                 |          |          |
| 5.5              | EP4557NT        |                 |          |          |
| Ø5.5             | 1.5             |                 | 4.0      | Non-Hex  |
|                  | 2.5             | EP5524NT        |          |          |
|                  | 3.5             | EP5534NT        |          |          |
|                  | 4.5             | EP5544NT        |          |          |
|                  | 5.5             | EP5554NT        |          |          |
|                  | 1.5             | 5.5             |          |          |
|                  | 2.5             |                 | EP5525NT |          |
|                  | 3.5             |                 | EP5535NT |          |
|                  | 4.5             |                 | EP5545NT |          |
|                  | 5.5             |                 | EP5555NT |          |
|                  | 1.5             |                 | 7.0      |          |
|                  | 2.5             | EP5527NT        |          |          |
|                  | 3.5             | EP5537NT        |          |          |
|                  | 4.5             | EP5547NT        |          |          |
|                  | 5.5             | EP5557NT        |          |          |
| Ø6.5             | 1.5             | 4.0             |          | Non-Hex  |
|                  | 2.5             |                 | EP6524NT |          |
|                  | 3.5             |                 | EP6534NT |          |
|                  | 4.5             |                 | EP6544NT |          |
|                  | 5.5             |                 | EP6554NT |          |
|                  | 1.5             |                 | 5.5      |          |
|                  | 2.5             | EP6525NT        |          |          |
|                  | 3.5             | EP6535NT        |          |          |
|                  | 4.5             | EP6545NT        |          |          |
|                  | 5.5             | EP6555NT        |          |          |
|                  | 1.5             | 7.0             |          |          |
|                  | 2.5             |                 | EP6527NT |          |
|                  | 3.5             |                 | EP6537NT |          |
|                  | 4.5             |                 | EP6547NT |          |
|                  | 5.5             |                 | EP6557NT |          |

## ➔ Abutment Options (Continued)

### Milling Abutment

- Abutment Screw(AS20) included
- Used for abutment design by customized milling.
- Available in both Hex and Non-Hex in four diameters (Ø4.0, Ø4.5, Ø5.5 & Ø6.5) and in various cuff heights.
- Recommend torque : 35Ncm


| Profile Diameter | Cuff Height(mm) | Post Height(mm) | Type    | Ref.C    |
|------------------|-----------------|-----------------|---------|----------|
| Ø4.0             | 1.5             | 9.0             | Hex     | MA4015HT |
| Ø4.5             | 2.0             |                 |         | MA4520HT |
| Ø5.5             | 2.0             |                 |         | MA5520HT |
|                  | 4.0             |                 |         | MA5540HT |
| Ø6.5             | 2.5             |                 |         | MA6525HT |
|                  | 4.0             |                 |         | MA6540HT |
| Ø4.0             | 1.5             |                 | Non-Hex | MA4015NT |
| Ø4.5             | 2.0             |                 |         | MA4520NT |
| Ø5.5             | 2.0             |                 |         | MA5520NT |
|                  | 4.0             |                 |         | MA5540NT |
| Ø6.5             | 2.5             |                 |         | MA6525NT |
|                  | 4.0             |                 |         | MA6540NT |

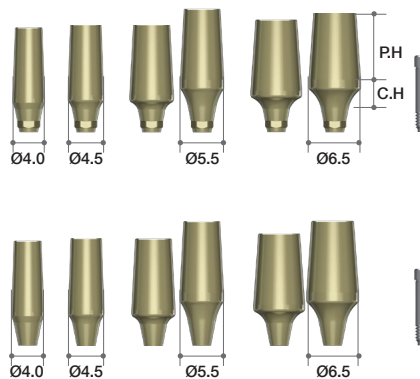

### Milling Abutment Type II (GALLI Abutment)

- AnyOne Internal : Abutment Screw (AS20) included.
- Long post enables easier customization from milling.
- Recommend torque : 35Ncm


| Profile Diameter | Cuff Height(mm) | Post Height(mm) | Type    | Ref.C       |
|------------------|-----------------|-----------------|---------|-------------|
| Ø4.0             | 1.0             | 19              | Hex     | AOBOT4019HT |
|                  |                 |                 | Non-Hex | AOBOT4019NT |



### Angled Abutment

- Abutment Screw(AS20) included
- 2 different angulations (15°, 25°)
- Available in two diameters (Ø4.5 & Ø5.5) and in two cuff heights (2.5 & 4.5mm).
- Height of minimized screw head helps to prevent milling problems.
- Profile Diameters : Ø4.5, Ø5.5
- Cuff Height : 2.5, 4.5mm
- Recommend torque : 35Ncm

| Profile Diameter | Cuff Height (mm) | Post Height (mm) | Type    | Angle    | Ref.C    |
|------------------|------------------|------------------|---------|----------|----------|
| Ø4.5             | 2.5              | 7.0              | Hex     | 15°      | AA4215HT |
|                  |                  |                  |         | 25°      | AA4225HT |
|                  | 15°              |                  |         | AA4415HT |          |
|                  | 25°              |                  |         | AA4425HT |          |
| Ø5.5             | 2.5              |                  | Hex     | 15°      | AA5215HT |
|                  |                  |                  |         | 25°      | AA5225HT |
|                  | 4.5              |                  |         | 15°      | AA5415HT |
|                  |                  |                  |         | 25°      | AA5425HT |
| Ø4.5             | 2.5              | Non-Hex          | 15°     | AA4215NT |          |
|                  |                  |                  | 25°     | AA4225NT |          |
|                  | 4.5              |                  | 15°     | AA4415NT |          |
|                  |                  |                  | 25°     | AA4425NT |          |
| Ø5.5             | 2.5              |                  | Non-Hex | 15°      | AA5215NT |
|                  |                  |                  |         | 25°      | AA5225NT |
|                  | 4.5              |                  |         | 15°      | AA5415NT |
|                  |                  |                  |         | 25°      | AA5425NT |
| Ø4.5             | 2.5              | Hex-E            | 15°     | AA4215ET |          |
|                  |                  |                  | 25°     | AA4225ET |          |
|                  | 4.5              |                  | 15°     | AA4415ET |          |
|                  |                  |                  | 25°     | AA4425ET |          |
| Ø5.5             | 2.5              |                  | Hex-E   | 15°      | AA5215ET |
|                  |                  |                  |         | 25°      | AA5225ET |
|                  | 4.5              |                  |         | 15°      | AA5415ET |
|                  |                  |                  |         | 25°      | AA5425ET |

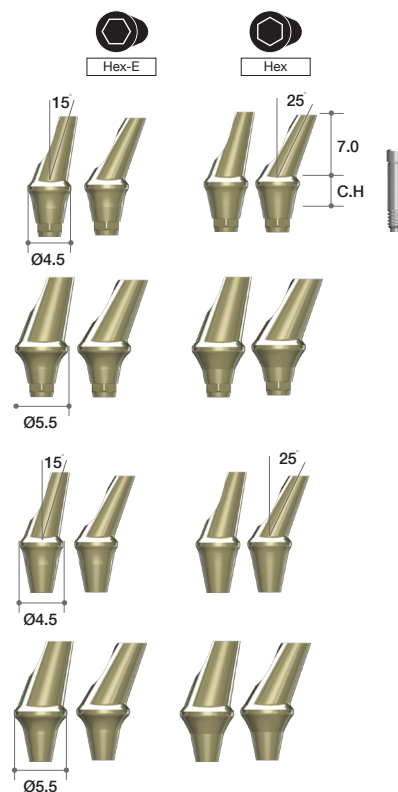


## Gold Abutment

- Abutment Screw(AS20) included

- For fabrication of customized abutment for either screw or cement retained restorations.
- Available in both hex (red) and non-hex (white)
- Melting point of gold alloy : 1063°C
- Threaded sleeves allow for better retention of resin or wax.
- Recommend torque : 30Ncm

| Profile Diameter | Cuff Height (mm) | Post Height (mm) | Type    | Ref.C    |
|------------------|------------------|------------------|---------|----------|
| Ø4.5             | 1.0              | 11.0             | Hex     | GA4515HT |
|                  |                  |                  | Non-Hex | GA4515NT |




## CCM Abutment

- Abutment Screw(AS20) included


- Useful to make a customized abutment in difficult situations.
- Can be casted with non-precious alloys(Ni-Cr, Cr-Co alloys).
- Non-precious melting temperature : Depend on Manufacturer
- Threaded sleeves for convenient Resin / Wax-up.
- Melting temperature of CCM : 1300~1400°C
- Recommend torque : 35Ncm

| Profile Diameter | Cuff Height (mm) | Post Height (mm) | Type    | Ref.C    |
|------------------|------------------|------------------|---------|----------|
| Ø4.5             | 1.0              | 11.0             | Hex     | CA4515HT |
|                  |                  |                  | Non-Hex | CA4515NT |



## II. Abutment Level Prosthesis


# 1. Solid Abutment & Components

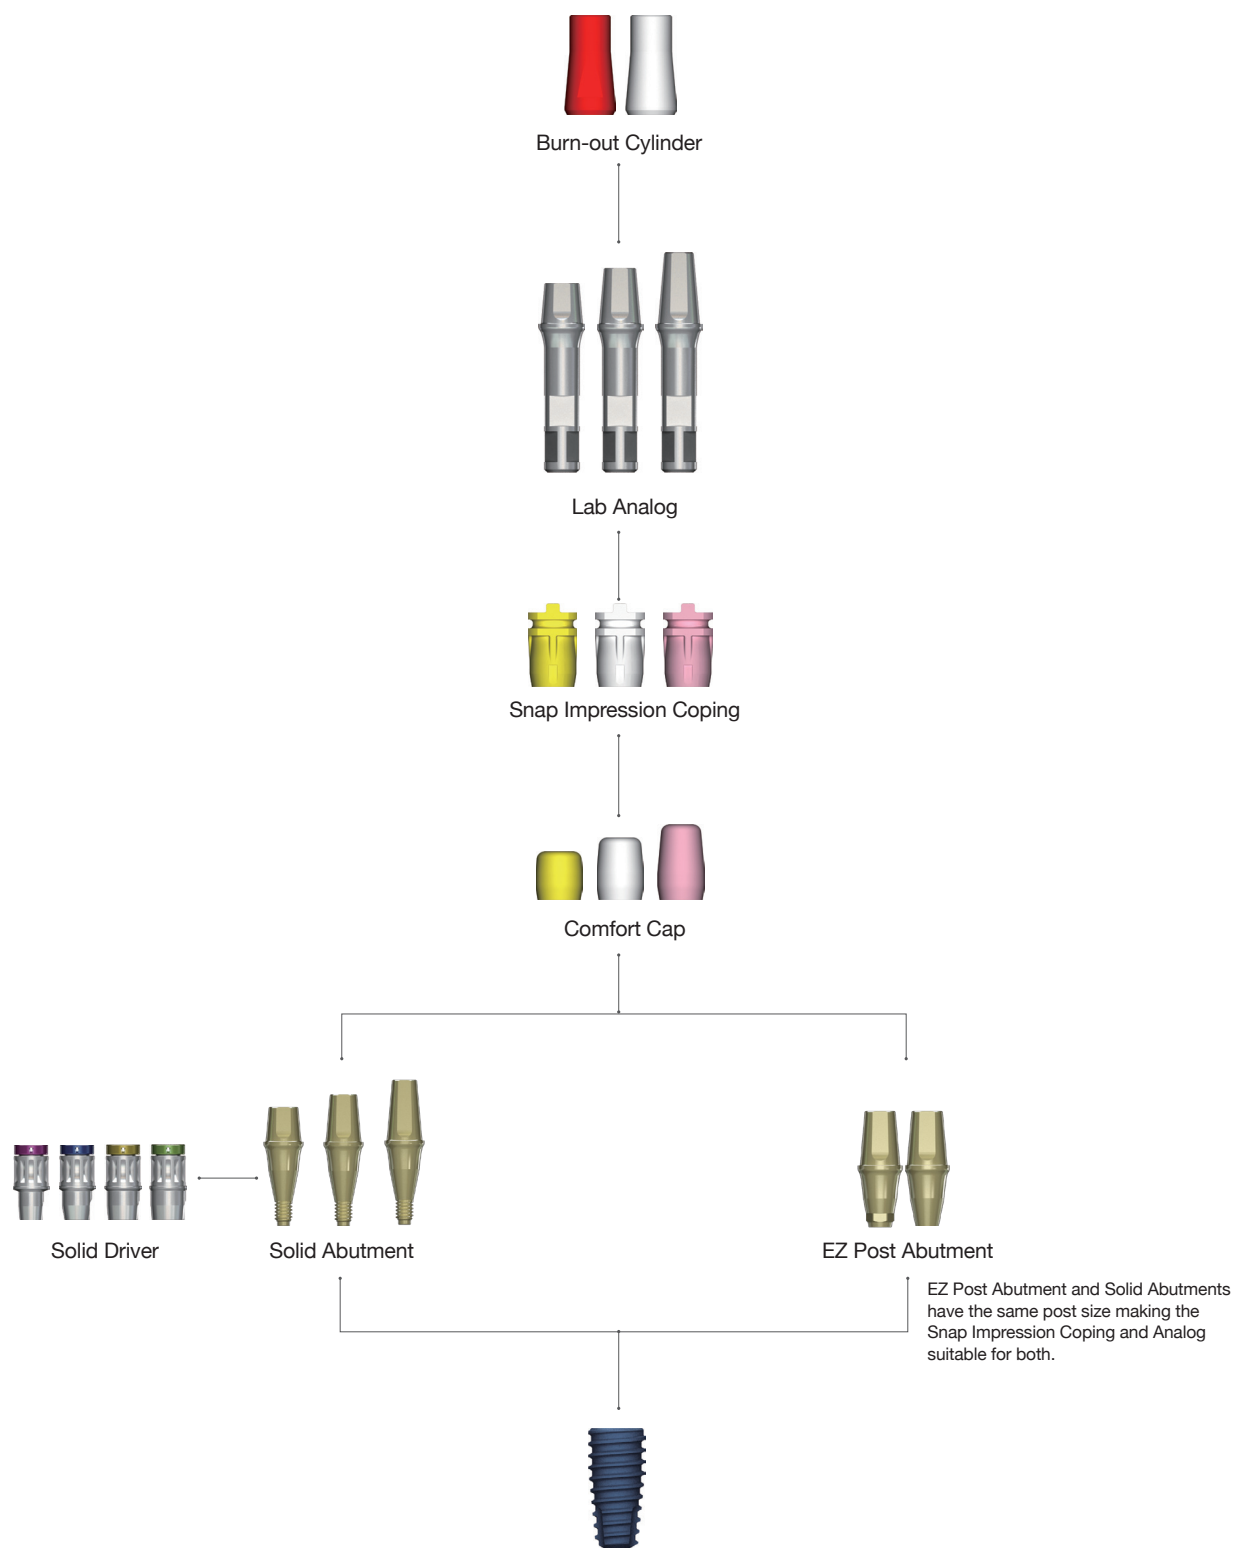

## ➔ Solid Abutment & Lab Analog

### Solid Abutment

- Cement retained restoration only.
- Solid Abutment should be placed into patient's mouth before taking impression.
- Should be tightened with Solid Driver and Hand Driver.
- Recommend Torque : 35Ncm
- Profile Diameter : Ø4.0, Ø4.5, Ø5.5, Ø6.5
- Cuff Height : 1.0, 1.5, 2.5, 3.5, 4.5, 5.5mm
- Recommend torque : 35Ncm

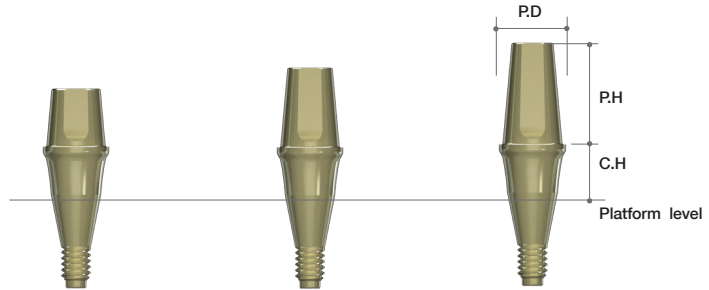


| Profile Diameter | Cuff Height(mm) | Post Height(mm) | Ref.C   |
|------------------|-----------------|-----------------|---------|
| Ø4.0             | 1.0             | 4.0             | SL40104 |
|                  | 1.5             |                 | SL40154 |
|                  | 2.5             |                 | SL40254 |
|                  | 3.5             |                 | SL40354 |
|                  | 4.5             |                 | SL40454 |
|                  | 5.5             | SL40554         |         |
|                  | 1.0             | 5.5             | SL40105 |
|                  | 1.5             |                 | SL40155 |
|                  | 2.5             |                 | SL40255 |
|                  | 3.5             |                 | SL40355 |
|                  | 4.5             |                 | SL40455 |
|                  | 5.5             | SL40555         |         |
|                  | 1.0             | 7.0             | SL40107 |
|                  | 1.5             |                 | SL40157 |
|                  | 2.5             |                 | SL40257 |
| 3.5              | SL40357         |                 |         |
| 4.5              | SL40457         |                 |         |
| 5.5              | SL40557         |                 |         |
| Ø4.5             | 1.0             | 4.0             | SL45104 |
|                  | 1.5             |                 | SL45154 |
|                  | 2.5             |                 | SL45254 |
|                  | 3.5             |                 | SL45354 |
|                  | 4.5             |                 | SL45454 |
|                  | 5.5             | SL45554         |         |
|                  | 1.0             | 5.5             | SL45105 |
|                  | 1.5             |                 | SL45155 |
|                  | 2.5             |                 | SL45255 |
|                  | 3.5             |                 | SL45355 |
|                  | 4.5             |                 | SL45455 |
|                  | 5.5             | SL45555         |         |
|                  | 1.0             | 7.0             | SL45107 |
|                  | 1.5             |                 | SL45157 |
|                  | 2.5             |                 | SL45257 |
| 3.5              | SL45357         |                 |         |
| 4.5              | SL45457         |                 |         |
| 5.5              | SL45557         |                 |         |

| Profile Diameter | Cuff Height(mm) | Post Height(mm) | Ref.C   |
|------------------|-----------------|-----------------|---------|
| Ø5.5             | 1.5             | 4.0             | SL55154 |
|                  | 2.5             |                 | SL55254 |
|                  | 3.5             |                 | SL55354 |
|                  | 4.5             |                 | SL55454 |
|                  | 5.5             |                 | SL55554 |
|                  | 1.5             | 5.5             | SL55155 |
|                  | 2.5             |                 | SL55255 |
|                  | 3.5             |                 | SL55355 |
|                  | 4.5             |                 | SL55455 |
|                  | 5.5             |                 | SL55555 |
|                  | 1.5             | 7.0             | SL55157 |
|                  | 2.5             |                 | SL55257 |
|                  | 3.5             |                 | SL55357 |
|                  | 4.5             |                 | SL55457 |
|                  | 5.5             |                 | SL55557 |
| Ø6.5             | 1.5             | 4.0             | SL65154 |
|                  | 2.5             |                 | SL65254 |
|                  | 3.5             |                 | SL65354 |
|                  | 4.5             |                 | SL65454 |
|                  | 5.5             |                 | SL65554 |
|                  | 1.5             | 5.5             | SL65155 |
|                  | 2.5             |                 | SL65255 |
|                  | 3.5             |                 | SL65355 |
|                  | 4.5             |                 | SL65455 |
|                  | 5.5             |                 | SL65555 |
|                  | 1.5             | 7.0             | SL65157 |
|                  | 2.5             |                 | SL65257 |
|                  | 3.5             |                 | SL65357 |
|                  | 4.5             |                 | SL65457 |
|                  | 5.5             |                 | SL65557 |

### Lab Analog

- Used for Solid Abutment
- Used only if Solid Abutment was not modified.

| Profile Diameter | Height(mm) | Ref.C   |
|------------------|------------|---------|
| Ø4.0             | 4.0        | LA4040P |
|                  | 5.5        | LA4055P |
|                  | 7.0        | LA4070P |
| Ø4.5             | 4.0        | LA4540P |
|                  | 5.5        | LA4555P |
|                  | 7.0        | LA4570P |
| Ø5.5             | 4.0        | LA5540P |
|                  | 5.5        | LA5555P |
|                  | 7.0        | LA5570P |
| Ø6.5             | 4.0        | LA6540P |
|                  | 5.5        | LA6555P |
|                  | 7.0        | LA6570P |




## ➔ Components for Solid Abutment

### Comfort Cap

- Protects a Solid Abutment and minimizes irritation to tongue and oral mucosa.
- Easily make a temporary crown by resin build up.
- Color coded according to post heights.  
[Yellow : PH 4.0mm, White : PH 5.5mm, Pink : PH 7.0mm]


| Profile Diameter | Post Height(mm) | Ref.C  |
|------------------|-----------------|--------|
| Ø4.0             | 4.0             | CC4040 |
|                  | 5.5             | CC4055 |
|                  | 7.0             | CC4070 |
| Ø4.5             | 4.0             | CC4540 |
|                  | 5.5             | CC4555 |
|                  | 7.0             | CC4570 |
| Ø5.5             | 4.0             | CC5540 |
|                  | 5.5             | CC5555 |
|                  | 7.0             | CC5570 |
| Ø6.5             | 4.0             | CC6540 |
|                  | 5.5             | CC6555 |
|                  | 7.0             | CC6570 |

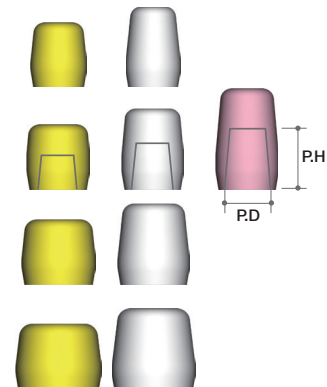

### Snap Impression Coping

- Used for precise Impression Coping on Solid Abutment.
- Color coded for 3 different post heights.  
[Yellow : PH 4.0mm, White : PH 5.5mm, Pink : PH 7.0mm]
- Do not use if Solid Abutment has been modified.


| Profile Diameter | Post Height(mm) | Ref.C   |
|------------------|-----------------|---------|
| Ø4.0             | 4.0             | SIC4040 |
|                  | 5.5             | SIC4055 |
|                  | 7.0             | SIC4070 |
| Ø4.5             | 4.0             | SIC4540 |
|                  | 5.5             | SIC4555 |
|                  | 7.0             | SIC4570 |
| Ø5.5             | 4.0             | SIC5540 |
|                  | 5.5             | SIC5555 |
|                  | 7.0             | SIC5570 |
| Ø6.5             | 4.0             | SIC6540 |
|                  | 5.5             | SIC6555 |
|                  | 7.0             | SIC6570 |

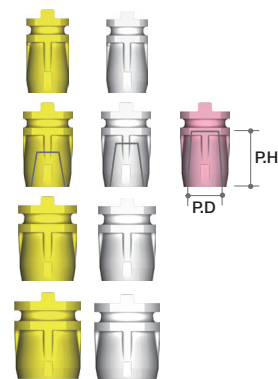

### Burn-out Cylinder


- Precise fit with post of Solid Abutment, EZ Post Abutment, Lab Analog.
- Easy to wax up, provides accurate margins and clean burnout.
- Available both Single(red) and Bridge(white).

| Profile Diameter | Type   | Ref.C   |
|------------------|--------|---------|
| Ø4.0             | Single | BC4070S |
| Ø4.5             |        | BC4570S |
| Ø5.5             |        | BC5570S |
| Ø6.5             |        | BC6570S |
| Ø4.0             | Bridge | BC4070B |
| Ø4.5             |        | BC4570B |
| Ø5.5             |        | BC5570B |
| Ø6.5             |        | BC6570B |



## II. Abutment Level Prosthesis

# 2. Octa Abutment & Components

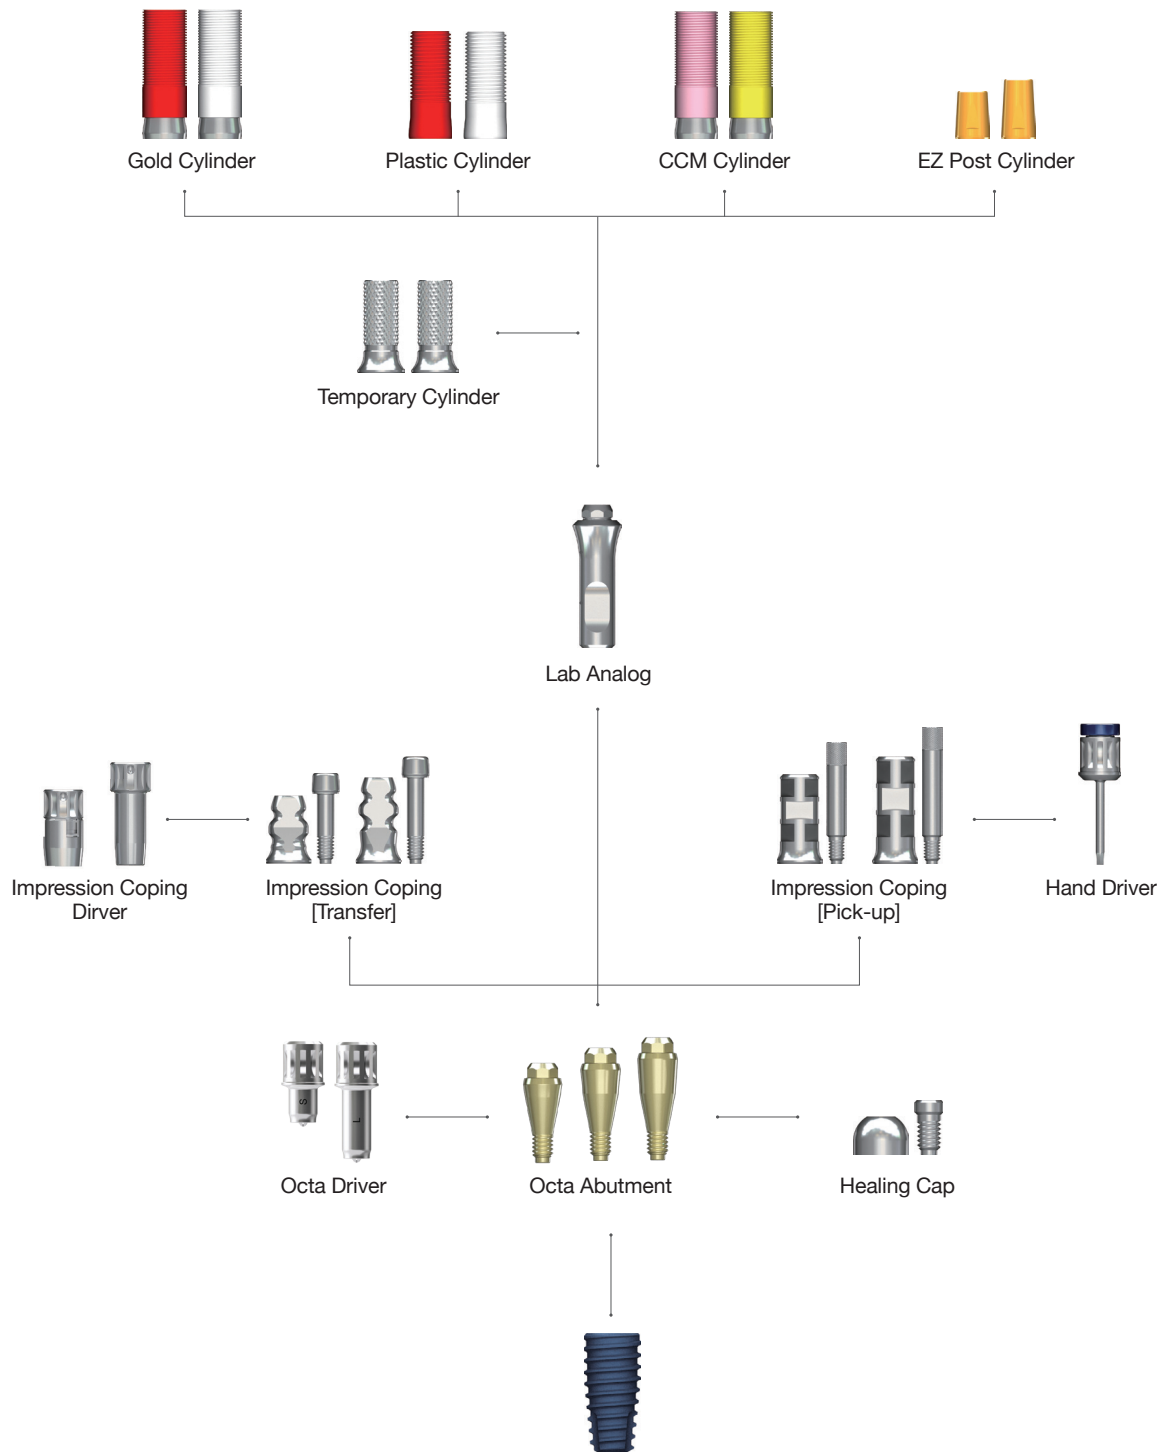


## ➔ Components for Octa Abutment (Continued)

### Octa Abutment

- Used to make multiple screw-retained prosthetics.
- Recommend torque : 35Ncm

| Profile Diameter | Cuff Height(mm) | Ref.C  |
|------------------|-----------------|--------|
| Ø3.8             | 1.0             | OA4010 |
|                  | 1.5             | OA4015 |
|                  | 2.5             | OA4025 |
|                  | 3.5             | OA4035 |
|                  | 4.5             | OA4045 |
| Ø4.8             | 1.0             | OA5010 |
|                  | 1.5             | OA5015 |
|                  | 2.5             | OA5025 |
|                  | 3.5             | OA5035 |
|                  | 5.5             | OA5055 |
| Ø5.8             | 1.0             | OA6010 |
|                  | 1.5             | OA6015 |
|                  | 2.5             | OA6025 |
|                  | 3.5             | OA6035 |
|                  | 5.5             | OA6055 |

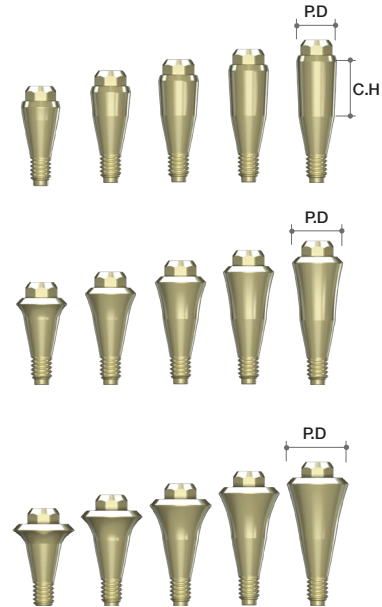

### Healing Cap

- Cylinder Screw (IRCS200) included
- Protects Octa Abutment and minimizes irritation to tongue and oral mucosa.

| Profile Diameter | Ref.C       |
|------------------|-------------|
| Ø4.0             | AANOHC4000T |
| Ø5.0             | IHC400T     |
| Ø6.0             | AANOHC6000T |






## Impression Coping (Transfer)

- Guide Pin(AAOTGP10 / AAOTGP12) included

- Should be tightened with Impression Coping Driver (Page.425)
- Special impression coping screw which can be used with a 1.2mm hex driver is available on request.


| Profile Diameter | Height (mm) | Type     | Ref.C       |
|------------------|-------------|----------|-------------|
| Ø4.0             | 7.5         | Octa     | AAOITO4010T |
|                  |             | Non-octa | AAOITN4010T |
|                  | 9.5         | Octa     | AAOITO4012T |
|                  |             | Non-octa | AAOITN4012T |
| Ø5.0             | 7.5         | Octa     | AAOITO5010T |
|                  |             | Non-octa | AAOITN5010T |
|                  | 9.5         | Octa     | AAOITO5012T |
|                  |             | Non-octa | AAOITN5012T |
| Ø6.0             | 7.5         | Octa     | AAOITO6010T |
|                  |             | Non-octa | AAOITN6010T |
|                  | 9.5         | Octa     | AAOITO6012T |
|                  |             | Non-octa | AAOITN6012T |

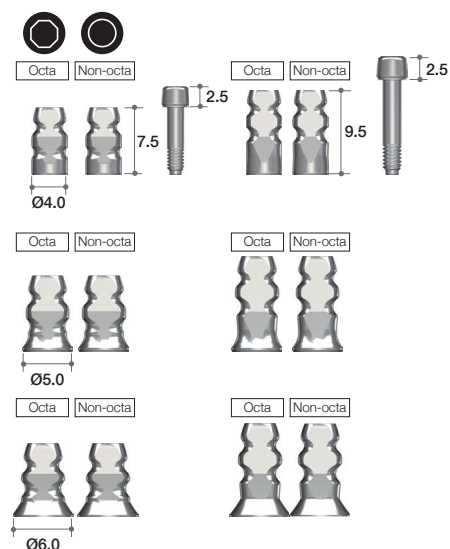

## Impression Coping (Pick-up)

- Guide Pin included


| Profile Diameter | Height (mm) | Type     | Ref.C       |
|------------------|-------------|----------|-------------|
| Ø4.0             | 10.0        | Octa     | AAOIPO4010T |
|                  |             | Non-octa | AAOIPN4010T |
|                  | 12.0        | Octa     | AAOIPO4012T |
|                  |             | Non-octa | AAOIPN4012T |
| Ø5.0             | 10.0        | Octa     | AAOIPO5010T |
|                  |             | Non-octa | AAOIPN5010T |
|                  | 12.0        | Octa     | AAOIPO5012T |
|                  |             | Non-octa | AAOIPN5012T |
| Ø6.0             | 10.0        | Octa     | AAOIPO6010T |
|                  |             | Non-octa | AAOIPN6010T |
|                  | 12.0        | Octa     | AAOIPO6012T |
|                  |             | Non-octa | AAOIPN6012T |

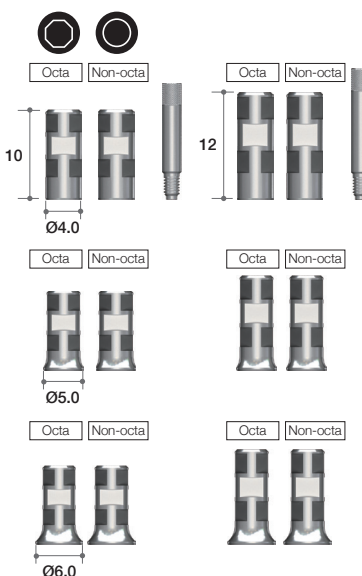

## ➔ Components for Octa Abutment

### Lab Analog

| Profile Diameter | Ref.C      |
|------------------|------------|
| Ø3.8             | AANOLA4000 |
| Ø4.8             | IOA300     |
| Ø5.8             | AANOLA6000 |




### Temporary Cylinder

- Cylinder Screw (IRCS200) included

- Recommend torque : 25Ncm

| Profile Diameter | Type     | Ref.C        |
|------------------|----------|--------------|
| Ø4.0             | Octa     | AANOTCO4010T |
|                  | Non-octa | AANOTCN4010T |
| Ø5.0             | Octa     | AANOTCO5010T |
|                  | Non-octa | AANOTCN5010T |
| Ø6.0             | Octa     | AANOTCO6010T |
|                  | Non-octa | AANOTCN6010T |

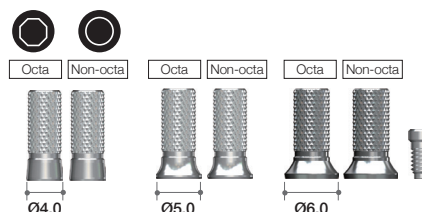


### EZ Post Cylinder

- Cylinder Screw (IRCS200) included

- Recommend torque : 25Ncm


| Profile Diameter | Post Height(mm) | Type     | Ref.C       |
|------------------|-----------------|----------|-------------|
| Ø4.0             | 5.5             | Octa     | AAOECO4005T |
|                  | 7.0             |          | AAOECO4007T |
|                  | 5.5             | Non-octa | AAOECN4005T |
|                  | 7.0             |          | AAOECN4007T |
| Ø5.0             | 5.5             | Octa     | AAOECO5005T |
|                  | 7.0             |          | AAOECO5007T |
|                  | 5.5             | Non-octa | AAOECN5005T |
|                  | 7.0             |          | AAOECN5007T |
| Ø6.0             | 5.5             | Octa     | AAOECO6005T |
|                  | 7.0             |          | AAOECO6007T |
|                  | 5.5             | Non-octa | AAOECN6005T |
|                  | 7.0             |          | AAOECN6007T |

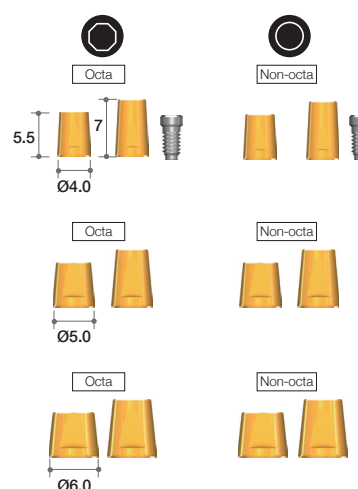

## Gold Cylinder

- Cylinder Screw (IRCS200) included
- For customizing abutment for screw retained multi-unit restoration.
  - Available in both octa(red) and non-octa(white)
- Melting point of gold alloy : 1063°C
- Threaded sleeves allow for better retention of resin or wax.
- Available in three diameters (Ø4.0, Ø5.0 & Ø6.0).
- Recommend torque : 30Ncm


| Profile Diameter | Type     | Ref.C       |
|------------------|----------|-------------|
| Ø4.0             | Octa     | AANGCO4000T |
|                  | Non-octa | AANGCN4000T |
| Ø5.0             | Octa     | IOGO100T    |
|                  | Non-octa | IIGN100T    |
| Ø6.0             | Octa     | AANGCO6000T |
|                  | Non-octa | AANGCN6000T |

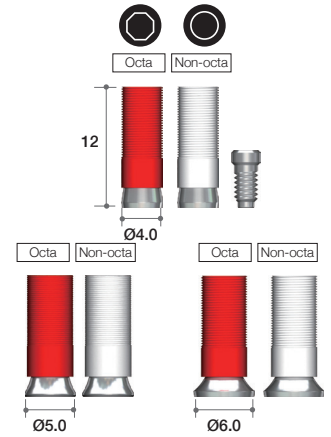

## CCM Cylinder

- Cylinder Screw (IRCS200) included
- Useful to make a customized abutment in difficult situations.
- Can be casted with non-precious alloys (Ni-Cr, Cr-Co alloys).
- Non-precious melting temperature : Depend on Manufacturer.
- Threaded sleeves for convenient Resin/ Wax-up.
- Melting temperature of CCM : 1300~1400°C
- Recommend torque : 35Ncm


| Profile Diameter | Type     | Ref.C       |
|------------------|----------|-------------|
| Ø4.0             | Octa     | AANCCO4000T |
|                  | Non-octa | AANCCN4000T |
| Ø5.0             | Octa     | AANCCO5000T |
|                  | Non-octa | AANCCN5000T |
| Ø6.0             | Octa     | AANCCO6000T |
|                  | Non-octa | AANCCN6000T |

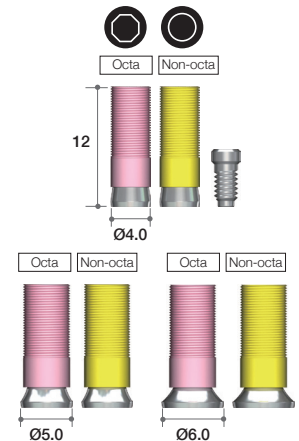

## Plastic Cylinder

- Cylinder Screw (IRCS200) included
- Economical option
- Used for customizing abutment for screw retained multi-unit restorations.
  - Available in both octa(red) and non-octa(white)
- Threaded sleeves allow for better retention of resin or wax.
- Recommend torque : 25Ncm


| Profile Diameter | Type     | Ref.C       |
|------------------|----------|-------------|
| Ø4.0             | Octa     | AAOTCO4010T |
|                  | Non-octa | AAOTCN4010T |
| Ø5.0             | Octa     | IOPH100T    |
|                  | Non-octa | IOPN100T    |
| Ø6.0             | Octa     | AAOTCO6010T |
|                  | Non-octa | AAOTCN6010T |

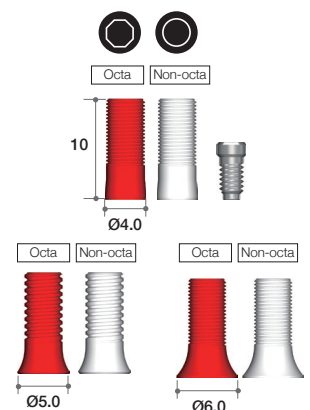

## II. Abutment Level Prosthesis

# 3-1. Multi-unit Abutment & Components (All-on-4) (N-Type)

*(For the design concept and variouale of the Multi-unit Abutment, Please refer to page.117)*

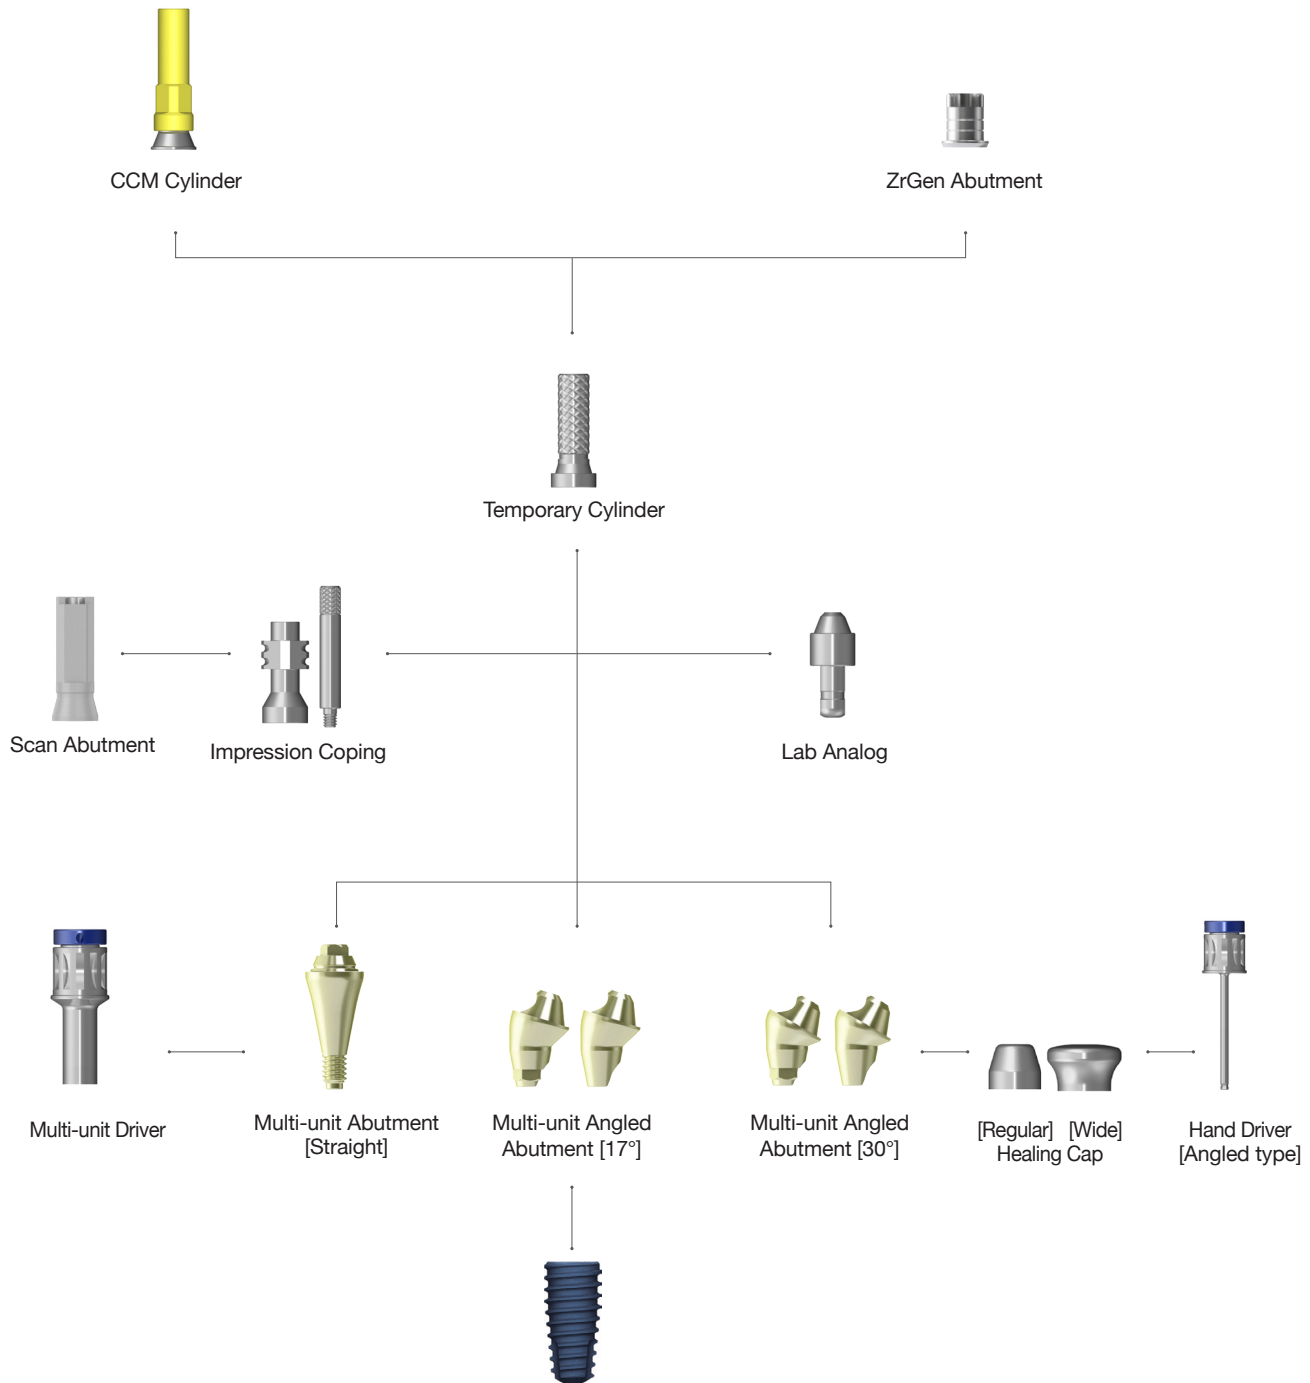


## ➔ Components for Multi-unit Abutment (Continued)

### Multi-unit Abutment - Straight

- MUA Straight Carrier (MUASC) included
- Recommend torque : 35Ncm


| Cuff Height (mm) | Type            | Ref.C       |
|------------------|-----------------|-------------|
| 1.5              | 1-piece<br>(M2) | MUAAON0015C |
| 2.5              |                 | MUAAON0025C |
| 3.5              |                 | MUAAON0035C |
| 4.5              |                 | MUAAON0045C |



### Multi-unit Angled Abutment - 17°

- MUA Screw (MUAAOS) included
- MUA Angled Carrier (MUAAC) included
- Recommend torque : 25Ncm


| Cuff Height (Labial) (mm) | Type    | Ref.C        |
|---------------------------|---------|--------------|
| 2.5 (1.1)                 | Hex     | MUAAOH1725TC |
| 3.5 (2.1)                 |         | MUAAOH1735TC |
| 4.5 (3.1)                 |         | MUAAOH1745TC |
| 2.5 (1.1)                 | Non-Hex | MUAAON1725TC |
| 3.5 (2.1)                 |         | MUAAON1735TC |
| 4.5 (3.1)                 |         | MUAAON1745TC |



### Multi-unit Angled Abutment - 30°

- MUA Screw (MUAAOS) included
- MUA Angled Carrier (MUAAC) included
- Recommend torque : 25Ncm

| Cuff Height (Labial) (mm) | Type    | Ref.C        |
|---------------------------|---------|--------------|
| 3.5 (1.1)                 | Hex     | MUAAOH3035TC |
| 4.5 (2.1)                 |         | MUAAOH3045TC |
| 3.5 (1.1)                 | Non-Hex | MUAAON3035TC |
| 4.5 (2.1)                 |         | MUAAON3045TC |




## ➔ Components for Multi-unit Abutment (Continued)

### Impression coping (Pick-up)

- Guide pin (MUAGP) included
- Use to take an impression at the abutment level.


| Connection | Ref.C  |
|------------|--------|
| Non-Hex    | MUAICT |



### Lab Analog

- Use to duplicate the Multi-unit abutment in the working model.
- Available to use as a RP Analog for 3D printed working model.


| Head form                  | Ref.C |
|----------------------------|-------|
| Multi-unit Abutment(Nobel) | MUALA |



### Temporary Cylinder

- Cylinder Screw (MUAS) 2EA included
- Use for fabricating acrylic provisional restoration.
- Grooves on the post cylinder allow storing resin adhesion.
- Back-up screw is included.
- Recommend torque : 15Ncm


| Connection | Ref.C  |
|------------|--------|
| Non-Hex    | MUATCL |



### CCM Cylinder

- Cylinder Screw (MUAS) 2EA included
- Use for fabricating screw retained prostheses with metal reinforced or bar structured overdentures.
- Available to cast with non-precious dental alloys (Ni-Cr, Cr-Co alloys)
- Melting temperature of CCM base: 1300~1400°C
- Back-up screw is included.
- Recommend torque : 15Ncm


| Connection | Ref.C   |
|------------|---------|
| Non-Hex    | MUACCML |



## Healing Cap

- Cylinder Screw (MUAS) 2ea included
- The size of healing cap can be selected depending on soft tissue volume or type of restorations.

| Type    | Ref.C   |
|---------|---------|
| Regular | MUAHCL  |
| Wide    | MUAHCWL |



### Healing Cap Set reference code

**Order code : Available by changing to 'P' instead of 'L' from current Ref.C**


Ex) MUAHCL → MUAHCP



## Try-in Abutment

- Cuff height is indicated with laser markings
- Straight, 17°, 30°
- Non-hex type

| Angle    | Cuff Marking          | Ref.C      |
|----------|-----------------------|------------|
| Straight | 1.5 / 2.5 / 3.5 / 4.5 | MUTIAAO00C |
| 17°      | 2.5 / 3.5 / 4.5       | MUTIAAO17C |
| 30°      | 3.5 / 4.5             | MUTIAAO30C |

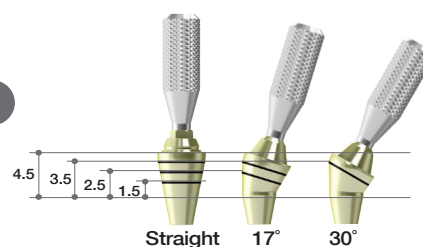

### Try-in Abutment Set reference code

**Order code : MUTIAAO00C P**



\* Kit contains Straight, 17° and 30° type of Try-in Abutments (1 each)




## ➔ Components for Multi-unit Abutment

### Multi-unit Driver

- Use to torque straight type Multi-unit Abutments.
- Use with a torque wrench (ref code: **MTW300A**)


| Hex | Length | Ref.C |
|-----|--------|-------|
| 2.0 | 10     | MUD10 |



### Right Angle Driver

- Use to torque straight type Multi-unit Abutments.
- Use with latch-type handpiece.
- Use with Meg-TORQ (ref code: **MEG\_TORQ**)


| Hex | Length | Ref.C   |
|-----|--------|---------|
| 2.0 | 10     | MURAD10 |



### Hand Driver

- Use for abutment screw with 1.2 hex hole.
- Use up to 15° divergent.
- It should use under 30Ncm torque.


| Hex | Length | Ref.C    |
|-----|--------|----------|
| 1.2 | 20     | MUHD1220 |



### Removal Driver

- Use for abutment screw with 1.2 hex hole.
- Use up to 15° divergent.
- Exclusively for AnyRidge system.
- It should use under 30Ncm torque.

| Hex | Length | Ref.C   |
|-----|--------|---------|
| 1.2 | 20     | MUARD20 |





## ►► Multi-unit Abutment Set Contents

### Multi-unit Abutment Healing Cap-type Set Reference Code

Order code : Available by changing to 'HP' instead of 'C' or 'TC' from current Ref.C

Ex) MUAAOH1725TC → MUAAOH1725 HP

### Multi-unit Abutment CCM-type Set Reference Code

Order code : Available by changing to 'P' instead of 'C' or 'TC' from current Ref.C

Ex) MUAAOH1725TC → MUAAOH1725 P



AnyOne  
Internal






**Cuff**  
1.5mm  
2.5mm  
3.5mm  
4.5mm



**Cuff**  
2.5mm  
3.5mm  
4.5mm



**Cuff**  
3.5mm  
4.5mm



## ▶ Starting Package Contents

|              | Type    | Ref.C       |
|--------------|---------|-------------|
| Healing Cap  | Hex     | SKAOHN3000H |
|              | Non Hex | SKAONN3000H |
| CCM Abutment | Hex     | SKAOHN3000  |
|              | Non Hex | SKAONN3000  |



**Straight 8set**  
(2set x 4kind of cuff)

**Angle 17° 6set**  
(2set x 3kind of cuff)

**Angle 30° 4set**  
(2set x 2kind of cuff)

**Multi-unit Abutment with \*carrier**

\* MUA carrier is used to pick-up an abutment to the patient's mouth, and check its insertion angle.

Healing Cap (Regular) or CCM Cylinder  
Temporary Cylinder  
Lap Analog  
Impression Coping

**Surgical Instrument**

Multi-unit Driver    Right Angle Driver    Hand Driver    Removed Driver

**Healing Cap 2set**

Regular  
Wide

**Try-in Abutment 1set**  
(Straight, 17°, 30° each 1ea)


**Surgical Guide 2ea**

## ➔ Components for Multi-unit Abutment

### Surgical Guide



- The distance between the lines is 7mm
- Put center pin after initial drilling at the centric of arch. (Refer to the surgical protocol on page.126)

| Angle | Marking Length | Ref.C  |
|-------|----------------|--------|
| 30    | 7              | MUSG70 |

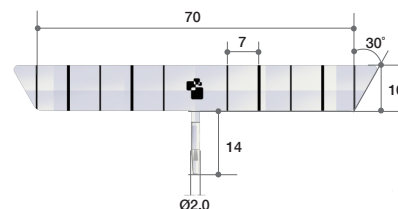

### ▶▶ How to use Surgical Guide


- ※ As Canine and 2<sup>nd</sup> premolar are most commonly used, the surgical guide has thicker lines for easier identification.
- ※ The surgical guide is able to use for 1st molar depending on surgical plan.

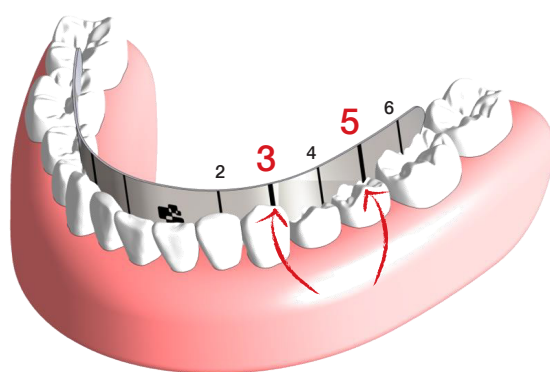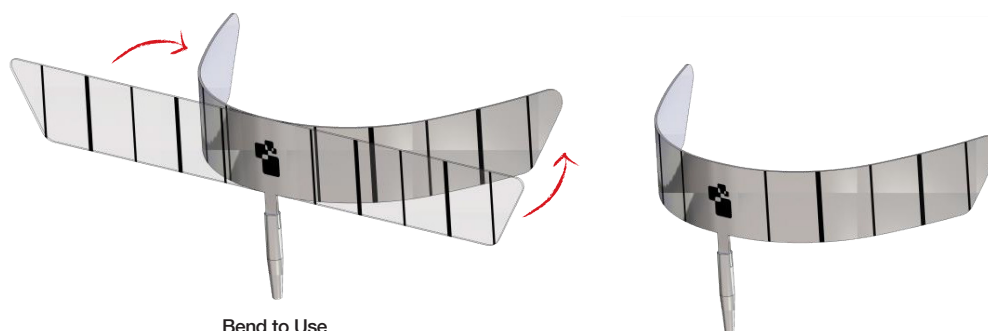

## II. Abutment Level Prosthesis

# 3-2. Multi-unit Abutment & Components (All-on-4) (S-Type)

(For the design concept and variouale of the Multi-unit Abutment, Please refer to page.130)

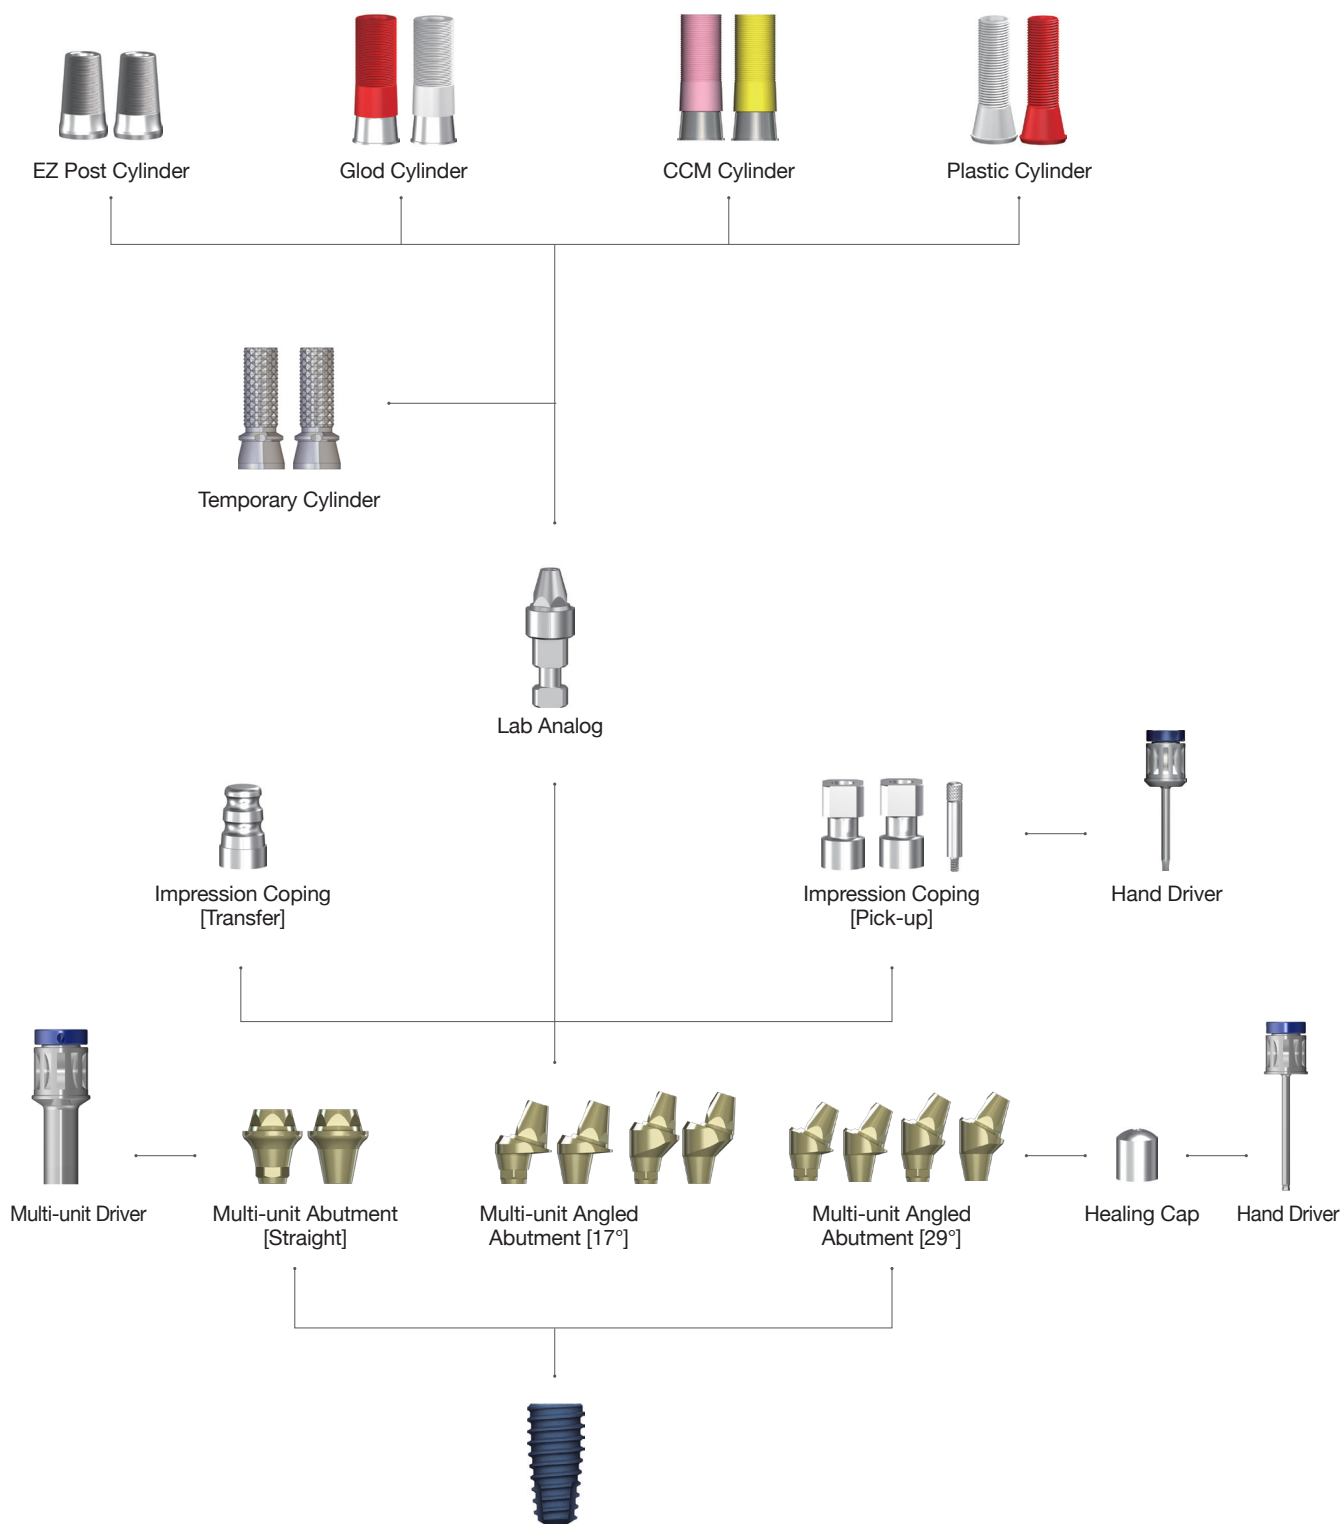


## ➔ Components for Multi-unit Abutment (Continued)

### Multi-unit Abutment (Straight)

- Multi-unit Abutment Screw (MUS15 / MUS25 / MUS35 / MUS45 / MUS55) included.

• Recommend torque : 35Ncm

| Cuff Height (mm) | Type    | Ref.C    |
|------------------|---------|----------|
| 1.5              | Hex     | MU5015HT |
| 2.5              |         | MU5025HT |
| 3.5              |         | MU5035HT |
| 4.5              |         | MU5045HT |
| 5.5              |         | MU5055HT |
| 1.5              | Non-Hex | MU5015NT |
| 2.5              |         | MU5025NT |
| 3.5              |         | MU5035NT |
| 4.5              |         | MU5045NT |
| 5.5              |         | MU5055NT |

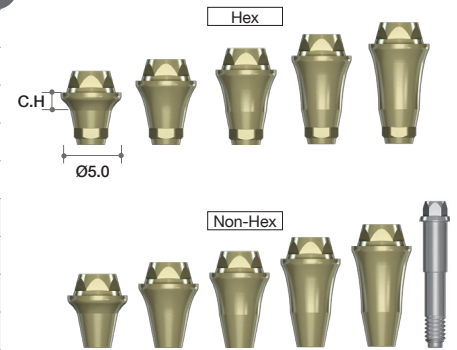


### Multi-unit Angled Abutment (17°)

- Abutment Screw (MUAS20) included

• Recommend torque : 35Ncm

| Cuff Height (mm) | Type    | Ref.C     |
|------------------|---------|-----------|
| 1.0              | Hex     | MU50117HT |
| 2.0              |         | MU50217HT |
| 3.0              |         | MU50317HT |
| 4.0              |         | MU50417HT |
| 1.0              | Non-Hex | MU50117NT |
| 2.0              |         | MU50217NT |
| 3.0              |         | MU50317NT |
| 4.0              |         | MU50417NT |

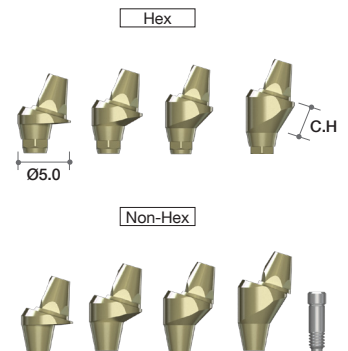


### Multi-unit Angled Abutment (29°)

- Abutment Screw (MUAS20) included

• Recommend torque : 35Ncm

| Cuff Height (mm) | Type    | Ref.C     |
|------------------|---------|-----------|
| 1.0              | Hex     | MU50129HT |
| 2.0              |         | MU50229HT |
| 3.0              |         | MU50329HT |
| 4.0              |         | MU50429HT |
| 1.0              | Non-Hex | MU50129NT |
| 2.0              |         | MU50229NT |
| 3.0              |         | MU50329NT |
| 4.0              |         | MU50429NT |



## ➔ Components for Multi-unit Abutment

### Healing Cap

| Profile Diameter | Ref.C  |
|------------------|--------|
| Ø5.0             | REC600 |



### Impression Coping (Transfer)

| Profile Diameter | Ref.C   |
|------------------|---------|
| Ø4.8             | RITE480 |



### Impression Coping (Pick-up)

- Guide Pin (RICG150) included

| Height (mm) | Ref.C    |
|-------------|----------|
| 9.4         | RIEH480T |
|             | RIEN480T |



### Lab Analog


| Profile Diameter | Ref.C   |
|------------------|---------|
| Ø4.8             | RELA300 |



### Temporary Cylinder

- Cylinder Screw (TASH140) included  
 • Recommend torque : 15Ncm

| Profile Diameter | Ref.C   |
|------------------|---------|
| Ø4.8             | ETH100T |
|                  | ETN100T |



## EZ Post Cylinder

- Cylinder Screw (TASH140) included
- Recommend torque : 15Ncm

| Profile Diameter | Type    | Ref.C   |
|------------------|---------|---------|
| Ø5.0             | Hex     | RCA900T |
|                  | Non-Hex | RCA800T |



## Gold Cylinder

- Cylinder Screw (TASH140) included
- For customizing abutment for screw retained multi-unit restoration.
  - Available in both octa(red) and non-octa(white)
- Melting point of gold alloy : 1063°C
- Threaded sleeves allow for better retention of resin or wax.
- Recommend torque : 15Ncm


| Profile Diameter | Sleeve color | Ref.C    |
|------------------|--------------|----------|
| Ø4.8             | Red          | REGC200T |
|                  | White        | REGC100T |



## CCM Cylinder

- Cylinder Screw (TASH140) included
- Useful to make a customized abutment in difficult situations.
- Can be casted with non-precious alloys (Ni-Cr, Cr-Co alloys).
- Non-precious melting temperature : Depends on Manufacturer
- Threaded sleeves for convenient Resin/ Wax-up.
- Melting temperature of CCM : 1300~1400°C
- Recommend torque : 15Ncm

| Profile Diameter | Sleeve color | Ref.C     |
|------------------|--------------|-----------|
| Ø4.8             | Pink         | RCA5013HT |
|                  | Yellow       | RCA5013NT |



## Plastic Cylinder

- Cylinder Screw (TASH140) included
- Economical option
- Used for customizing abutment for screw retained multi-unit restorations.
  - Available in both Hex(red) and Non-Hex(white)
- Threaded sleeves allow for better retention of resin or wax.
- Recommend torque : 15Ncm

| Profile Diameter | Sleeve color | Ref.C    |
|------------------|--------------|----------|
| Ø5.2             | Red          | RPEH100T |
|                  | White        | RPEN100T |



## II. Abutment Level Prosthesis


# 4. Flat Abutment & Components

: The main advantage of this Flat Abutment is the freedom on angulation.

Flat Abutment can cover any angulation problems.

: Only for multiple (Cannot be used for single implant)

: Only with screw retained prosthetics.

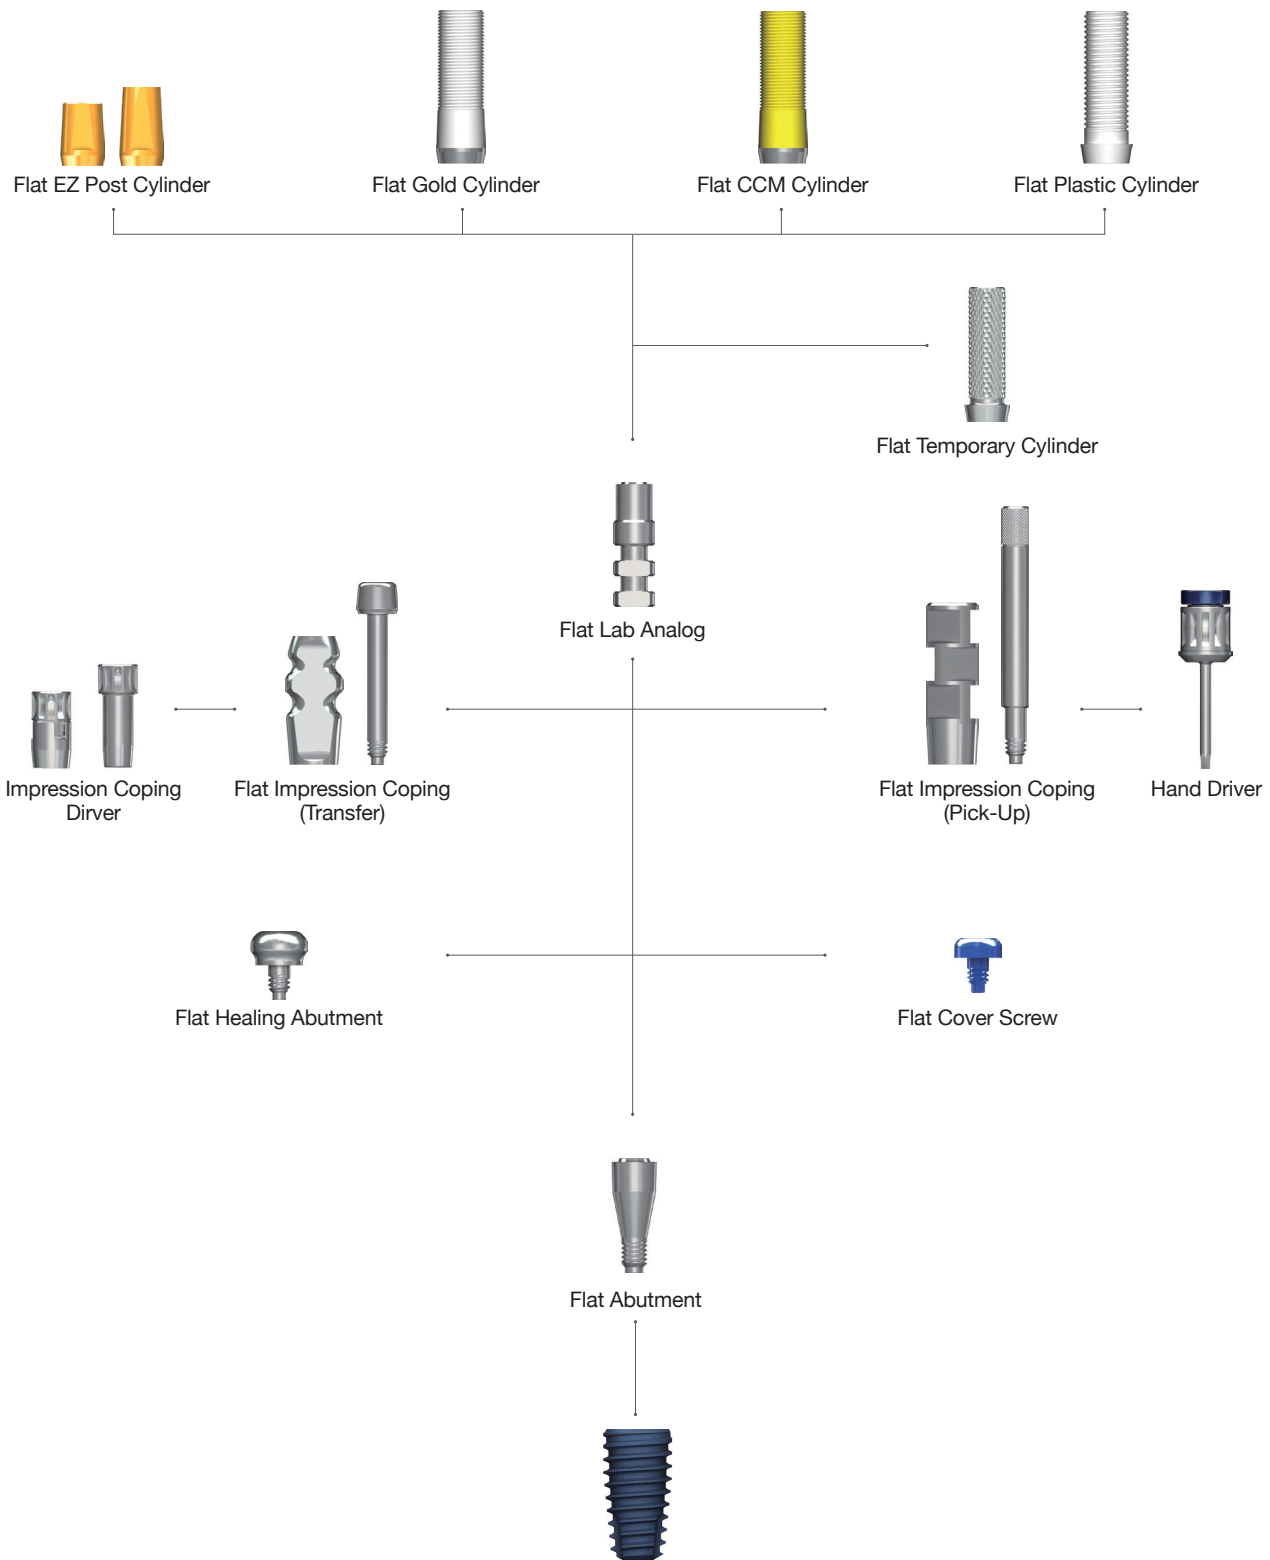



## ➔ Components for Flat Abutment (Continued)

### Flat Abutment

- Use Hand Driver (1.6 Hex)
- Recommend torque : 25Ncm

| Profile Diameter | Cuff Height (mm) | Ref.C  |
|------------------|------------------|--------|
| Ø3.5             | 1.5              | FA3515 |
|                  | 2.5              | FA3525 |
|                  | 3.5              | FA3535 |
|                  | 4.5              | FA3545 |
|                  | 5.5              | FA3555 |



### Flat Cover Screw

- Recommend torque : by hand (5 - 8Ncm)

| Profile Diameter | Ref.C   |
|------------------|---------|
| Ø3.5             | FCS3510 |



### Flat Healing Abutment

- Recommend torque : by hand (5 - 8Ncm)


| Height (mm) | Ref.C  |
|-------------|--------|
| 2           | FHA402 |
| 3           | FHA403 |
| 4           | FHA404 |



### Flat Impression Coping (Transfer)

- Guide Pin (FGPT74) included.
- Should be tightened with Impression Driver (Page.425)
- Special impression coping screw which can be used with a 1.2mm hex driver is available on request.


| Profile Diameter | Height (mm) | Ref.C    |
|------------------|-------------|----------|
| Ø4.0             | 12          | FIT4012T |



### Flat Impression Coping (Pick-Up)

- Guide pin (FGPP15) included.


| Profile Diameter | Height (mm) | Ref.C    |
|------------------|-------------|----------|
| Ø4.0             | 12          | FIP4012T |



## ➔ Components for Flat Abutment

### Flat Lab Analog

| Profile Diameter | Height (mm) | Ref.C   |
|------------------|-------------|---------|
| Ø3.5             | 12          | FLA3512 |



### Flat Temporary Cylinder

- Flat Cylinder Screw (FAS) included.
- Recommend torque : 15Ncm

| Profile Diameter | Ref.C    |
|------------------|----------|
| Ø4.0             | FTC4012T |



### Flat EZ Post Cylinder

- Flat Cylinder Screw (FAS) included.
- Recommend torque : 25Ncm

| Height (mm) | Ref.C    |
|-------------|----------|
| 5.5         | FEC4005T |
| 7.0         | FEC4007T |



### Flat Gold Cylinder

- Flat Cylinder Screw (FAS) included.
- Useful to make a customized abutment in difficult situations.
- Precious and non-precious alloys.
- Melting point of gold alloy : 1063°C
- Threaded sleeves for convenient Resin / Wax-up.
- Recommend torque : 25Ncm

| Profile Diameter | Ref.C    |
|------------------|----------|
| Ø3.8             | FGC4012T |



### Flat CCM Cylinder

- Flat Cylinder Screw (FAS) included.
- Useful to make a customized abutment in difficult situations.
- Can be casted with non-precious alloys (Ni-Cr, Cr-Co alloys).
- Non-precious melting temperature : Depend on Manufacturer
- Threaded sleeves for convenient Resin / Wax-up.
- Melting temperature of CCM : 1300~1400°C
- Recommend torque : 25Ncm

| Profile Diameter | Ref.C    |
|------------------|----------|
| Ø3.8             | FCC4012T |



### Flat Plastic Cylinder

- Flat Cylinder Screw (FAS) included.
- Recommend torque : 25Ncm


| Profile Diameter | Ref.C    |
|------------------|----------|
| Ø4.0             | FPC4012T |



## II. Abutment Level Prosthesis


# 5. EZ Crown & Components

(Refer to the advantage and manual of EZ CROWN on page.139)

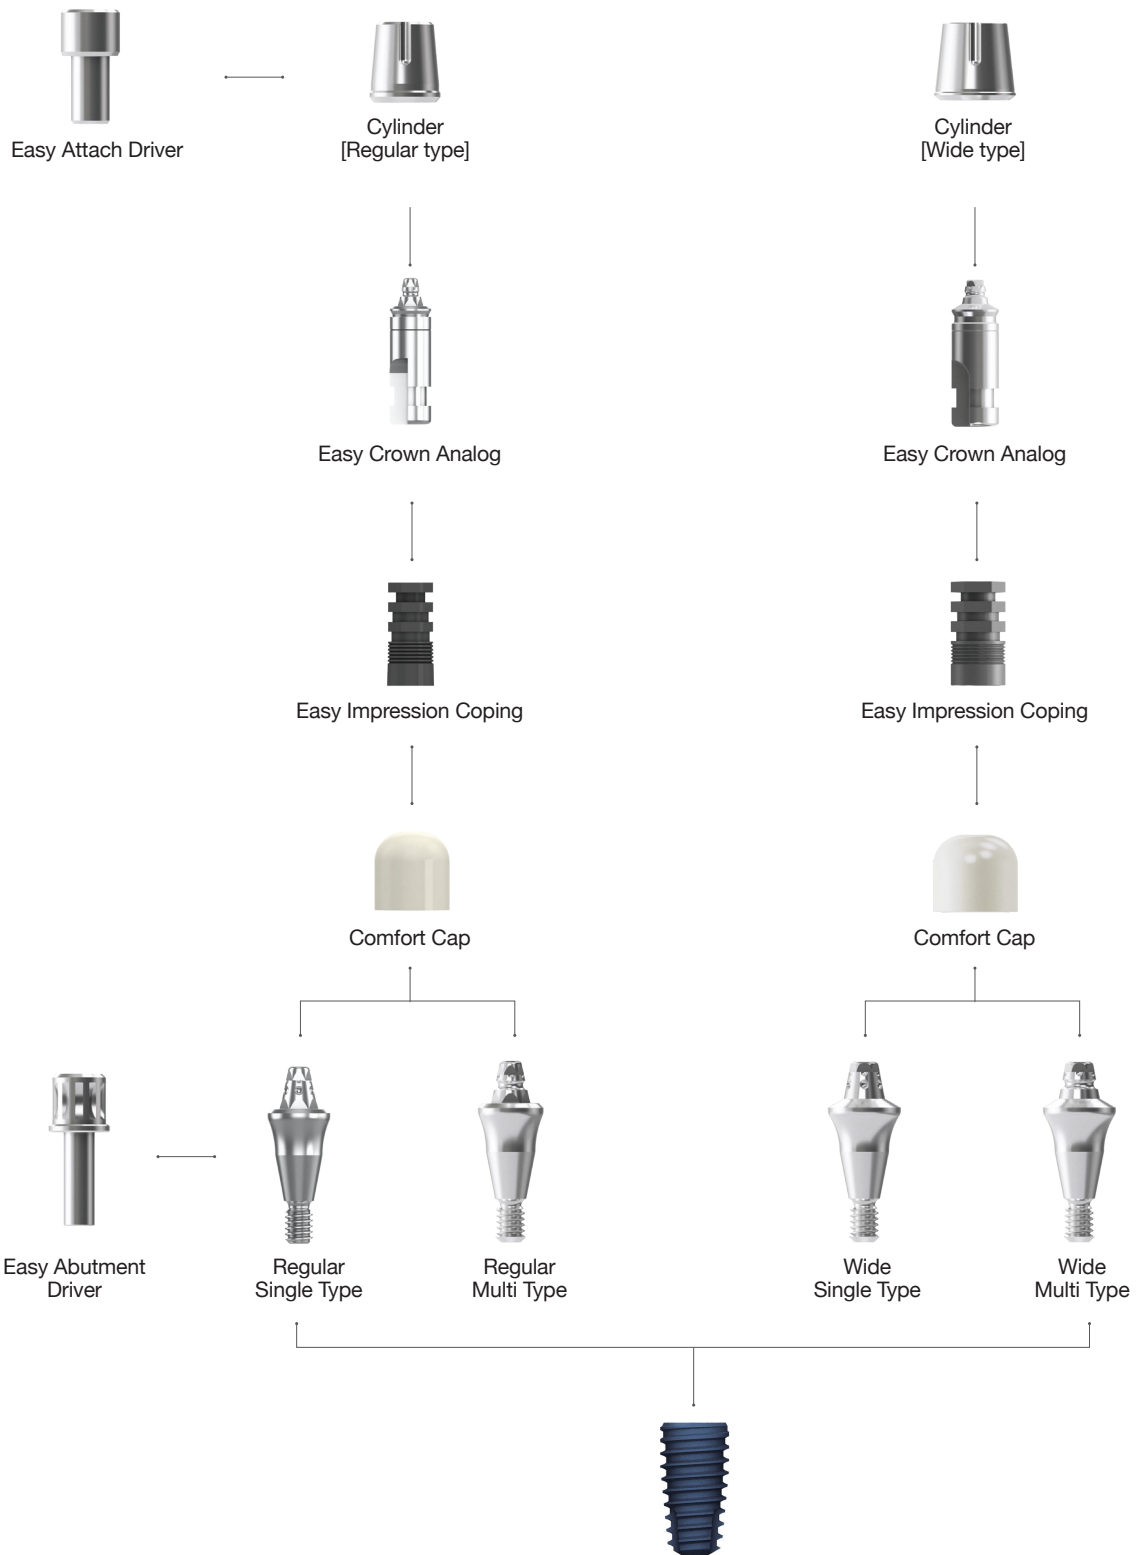

## ➔ Abutment Option

### Abutment

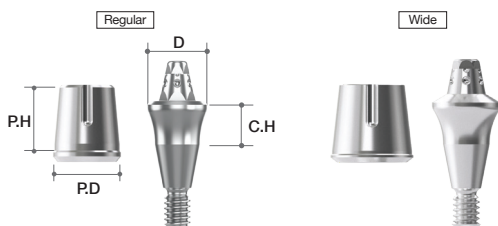


| System | Profile Diameter  | Cuff Height (mm) | Post Height (mm) | Ref.C     |          |
|--------|-------------------|------------------|------------------|-----------|----------|
|        |                   |                  |                  | Single    | Multi    |
| AnyOne | Regular (Ø 5.2)   | 1.0              | 3.8              | SS52138SR | S52138SR |
|        |                   | 2.0              |                  | SS52238SR | S52238SR |
|        |                   | 3.0              |                  | SS52338SR | S52338SR |
|        |                   | 4.0              |                  | SS52438SR | S52438SR |
|        |                   | 5.0              |                  | SS52538SR | S52538SR |
|        |                   | 1.0              | 5.0              | SS52150SR | S52150SR |
|        |                   | 2.0              |                  | SS52250SR | S52250SR |
|        |                   | 3.0              |                  | SS52350SR | S52350SR |
|        |                   | 4.0              |                  | SS52450SR | S52450SR |
|        |                   | 5.0              |                  | SS52550SR | S52550SR |
|        | Wide Type (Ø 6.0) | 3.8              | 1.0              | SS60138SR | S60138SR |
|        |                   |                  | 2.0              | SS60238SR | S60238SR |
|        |                   |                  | 3.0              | SS60338SR | S60338SR |
|        |                   |                  | 4.0              | SS60438SR | S60438SR |
|        |                   |                  | 5.0              | SS60538SR | S60538SR |
|        |                   | 5.0              | 1.0              | SS60150SR | S60150SR |
|        |                   |                  | 2.0              | SS60250SR | S60250SR |
|        |                   |                  | 3.0              | SS60350SR | S60350SR |
|        |                   |                  | 4.0              | SS60450SR | S60450SR |
|        |                   |                  | 5.0              | SS60550SR | S60550SR |

## ➔ Components for EZ CROWN


### Impression Coping

| Diameter | Type    | Ref.C |
|----------|---------|-------|
| Ø4.8     | Regular | EIC   |
| Ø5.5     | Wide    | EIC-W |




### Easy Crown Analog

| Diameter | Type    | Ref.C |
|----------|---------|-------|
| Ø4.5     | Regular | ECL   |
| Ø4.95    | Wide    | ECL-W |



### Comfort Cap


| Diameter | Type    | Ref.C |
|----------|---------|-------|
| Ø5.0     | Regular | ECH   |
| Ø6.0     | Wide    | ECH-W |



### Easy Abutment Driver

- Used to connect the Abutment


| Diameter | Type    | Ref.C |
|----------|---------|-------|
| Ø4.0     | Regular | EAD   |
| Ø4.1     | Wide    | EAD-W |



### Easy Attach Driver

- Used to engage and place the cylinder

| Diameter | Type    | Ref.C  |
|----------|---------|--------|
| Ø6.5     | Regular | EAAD   |
| Ø7.9     | Wide    | EAAD-W |



### Easy Removal Driver

- Used for cylinder retrieval

| Length(mm) | Ref.C |
|------------|-------|
| 12         | EARD  |



### Instrument Set

- Abutment Driver + Cylinder Driver + Retrieval Driver



### III. Overdenture Prosthesis

# 1. Meg-Loc Abutment & Component



Meg-Loc Metal Housing set



Block-out Spacer



Meg-Loc Abutment




## ➔ Meg-Loc Overdenture System

(Refer to the advantage of Meg-Loc overdenture system on page.146)

### Meg-Loc Abutment

- Angle compensation to one side 20 ° (both sides 40 °)
- Gently rounded shape
- Compatible with 1.2 Hex Driver
- Recommend torque : 35Ncm

| Cuff Height (mm) | Ref.C  |
|------------------|--------|
| 0                | MLAO00 |
| 1.0              | MLAO01 |
| 2.0              | MLAO02 |
| 3.0              | MLAO03 |
| 4.0              | MLAO04 |
| 5.0              | MLAO05 |
| 6.0              | MLAO06 |
| 7.0              | MLAO07 |



### Meg-Loc Package

- 1 Meg-Loc Abutment

\* Following package items are delivered with San DreMetto Korea packaging.


- 1 Titanium Housing
- 1 Block Out Spacer
- 4 Pekkton Retention Inserts (Gray-600gf(for lab), Yellow-1000gf, Red-1200gf, Mint-1800gf)

| Cuff Height (mm) | Ref.C   |
|------------------|---------|
| 0                | MLAO00P |
| 1.0              | MLAO01P |
| 2.0              | MLAO02P |
| 3.0              | MLAO03P |
| 4.0              | MLAO04P |
| 5.0              | MLAO05P |
| 6.0              | MLAO06P |
| 7.0              | MLAO07P |



### Meg-Loc Attachment


| Description                            | QTY | Ref.C     |
|--|-----|-----------|
| CM-LOC Attachment                      | SET | CM-LOC    |
| Housing Titanium® for Pekkton® Inserts | 4EA | CM-LOC-TP |
| Processing Insert (extra-low)          | 4EA | CM-LOC-PI |
| Insert (extra-low)                     | 4EA | CM-LOC-EL |
| Insert (low)                           | 4EA | CM-LOC-L  |
| Insert (medium)                        | 4EA | CM-LOC-M  |
| Block-out Spacer                       | 4EA | CM-LOC-BS |
| Impression Part                        | 4EA | CM-LOC-IP |
| Analog                                 | 4EA | CM-LOC-AN |

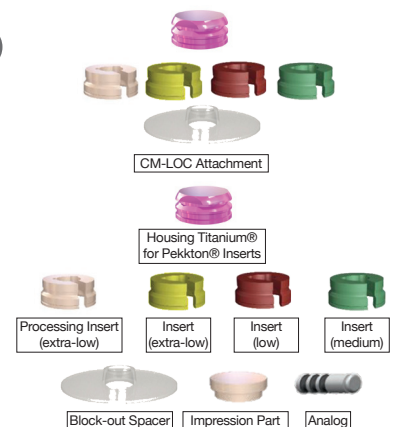

### Multi Tool

- Retention insert Insert & Remove Tool

| Ref.C |
|-------|
| MLMT  |



### III. Overdenture Prosthesis

## 2. Meg-Ball Abutment & Component






## ➔ Meg-Ball Overdenture System

(Refer to the advantage of Meg-Ball overdenture system on page.149)

### Meg-Ball Abutment

- Angle compensation to one side 15 °  
(both sides 30 °)
- Ø2.25 Ball shape
- Recommend torque : 35Ncm

| Cuff Height (mm) | Ref.C  |
|------------------|--------|
| 0                | MBAO00 |
| 1.0              | MBAO10 |
| 2.0              | MBAO20 |
| 3.0              | MBAO30 |
| 4.0              | MBAO40 |
| 5.0              | MBAO50 |
| 6.0              | MBAO60 |
| 7.0              | MBAO70 |



### Meg-Ball Package

- Composed of Meg-Ball Abutment/  
Metal Housing Set/  
Housing Positioner (0°,5°,10°,15°)

| Cuff Height (mm) | Ref.C   |
|------------------|---------|
| 0                | MBAO00P |
| 1.0              | MBAO10P |
| 2.0              | MBAO20P |
| 3.0              | MBAO30P |
| 4.0              | MBAO40P |
| 5.0              | MBAO50P |
| 6.0              | MBAO60P |
| 7.0              | MBAO70P |



### Meg-Ball Metal Housing Set

- 1 Metal Housing
- 1 Retentive Ring

| Ref.C |
|-------|
| MBHR  |



### Retentive Ring Set

- MBR5 = 5ea
- MBR10 = 10ea


| Quantity | Ref.C |
|----------|-------|
| 5        | MBR5  |
| 10       | MBR10 |



### Ball Driver


- For seating of the Ball Abutment into the fixture.
- Can connect to a Handpiece, Ratchet or Torque Wrench.
- Available in long and short.
- Refer to Page. 425

| Type                | Ref.c   |
|---------------------|---------|
| Toque Driver(Short) | TBT250S |
| Toque Driver(Long)  | TBT250L |

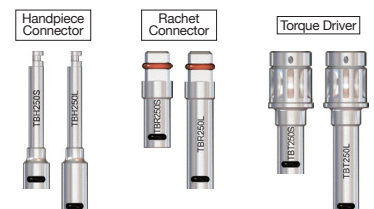

### III. Overdenture Prosthesis

## 3. Meg-Magnet Abutment & Component

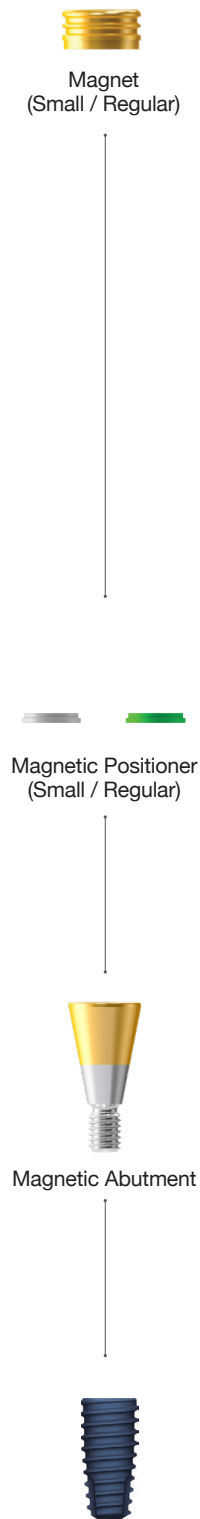


# ➔ Meg-Magnet Overdenture System

(Refer to the advantage of Meg-Magnet overdenture system on page.152)

## Meg-Magnet Abutment

- Use to 1.2 Hex Driver
- Recommend torque : 35Ncm

| Profile Diameter | Cuff Height (mm) | Ref.C   |
|------------------|------------------|---------|
| Ø4.5             | 0                | MMAO400 |
|                  | 1.0              | MMAO410 |
|                  | 2.0              | MMAO420 |
|                  | 3.0              | MMAO430 |
|                  | 4.0              | MMAO440 |
|                  | 5.0              | MMAO450 |
|                  | 6.0              | MMAO460 |
|                  | 7.0              | MMAO470 |
| Ø5.0             | 0                | MMAO500 |
|                  | 1.0              | MMAO510 |
|                  | 2.0              | MMAO520 |
|                  | 3.0              | MMAO530 |
|                  | 4.0              | MMAO540 |
|                  | 5.0              | MMAO550 |
|                  | 6.0              | MMAO560 |
|                  | 7.0              | MMAO570 |



## Meg-Magnet Package

- 1 Meg-Magnet Abutment
- 1 Magnet (Ø4.5-S, Ø5.0-R)
- 1 Magnetic Positioner

**\*Caution!**

**[Magnetic Positioner]**

- Use according to the standard
- : Small(White)/ Regular(Green)
- Do not reuse

**[Magnet]**


- Do not heat above 70°C
- : Loss of magnetism at high temperatures
- : If sterilization is required, alcohol disinfection is recommended, not autoclave
- Remove if taking MRI.
- No direct contact between products during the procedure
- : Difficulty in separation due to attraction between magnets

| Profile Diameter | Cuff Height (mm) | Ref.C    |
|------------------|------------------|----------|
| Ø4.5             | 0                | MMAO400P |
|                  | 1.0              | MMAO410P |
|                  | 2.0              | MMAO420P |
|                  | 3.0              | MMAO430P |
|                  | 4.0              | MMAO440P |
|                  | 5.0              | MMAO450P |
|                  | 6.0              | MMAO460P |
|                  | 7.0              | MMAO470P |
| Ø5.0             | 0                | MMAO500P |
|                  | 1.0              | MMAO510P |
|                  | 2.0              | MMAO520P |
|                  | 3.0              | MMAO530P |
|                  | 4.0              | MMAO540P |
|                  | 5.0              | MMAO550P |
|                  | 6.0              | MMAO560P |
|                  | 7.0              | MMAO570P |




## Meg-Magnet Attachment Set

| Size    | Ref.C |
|---------|-------|
| Small   | MA402 |
| Regular | MA502 |



### III. Overdenture Prosthesis

## 4. Meg-Rhein Abutment & Components

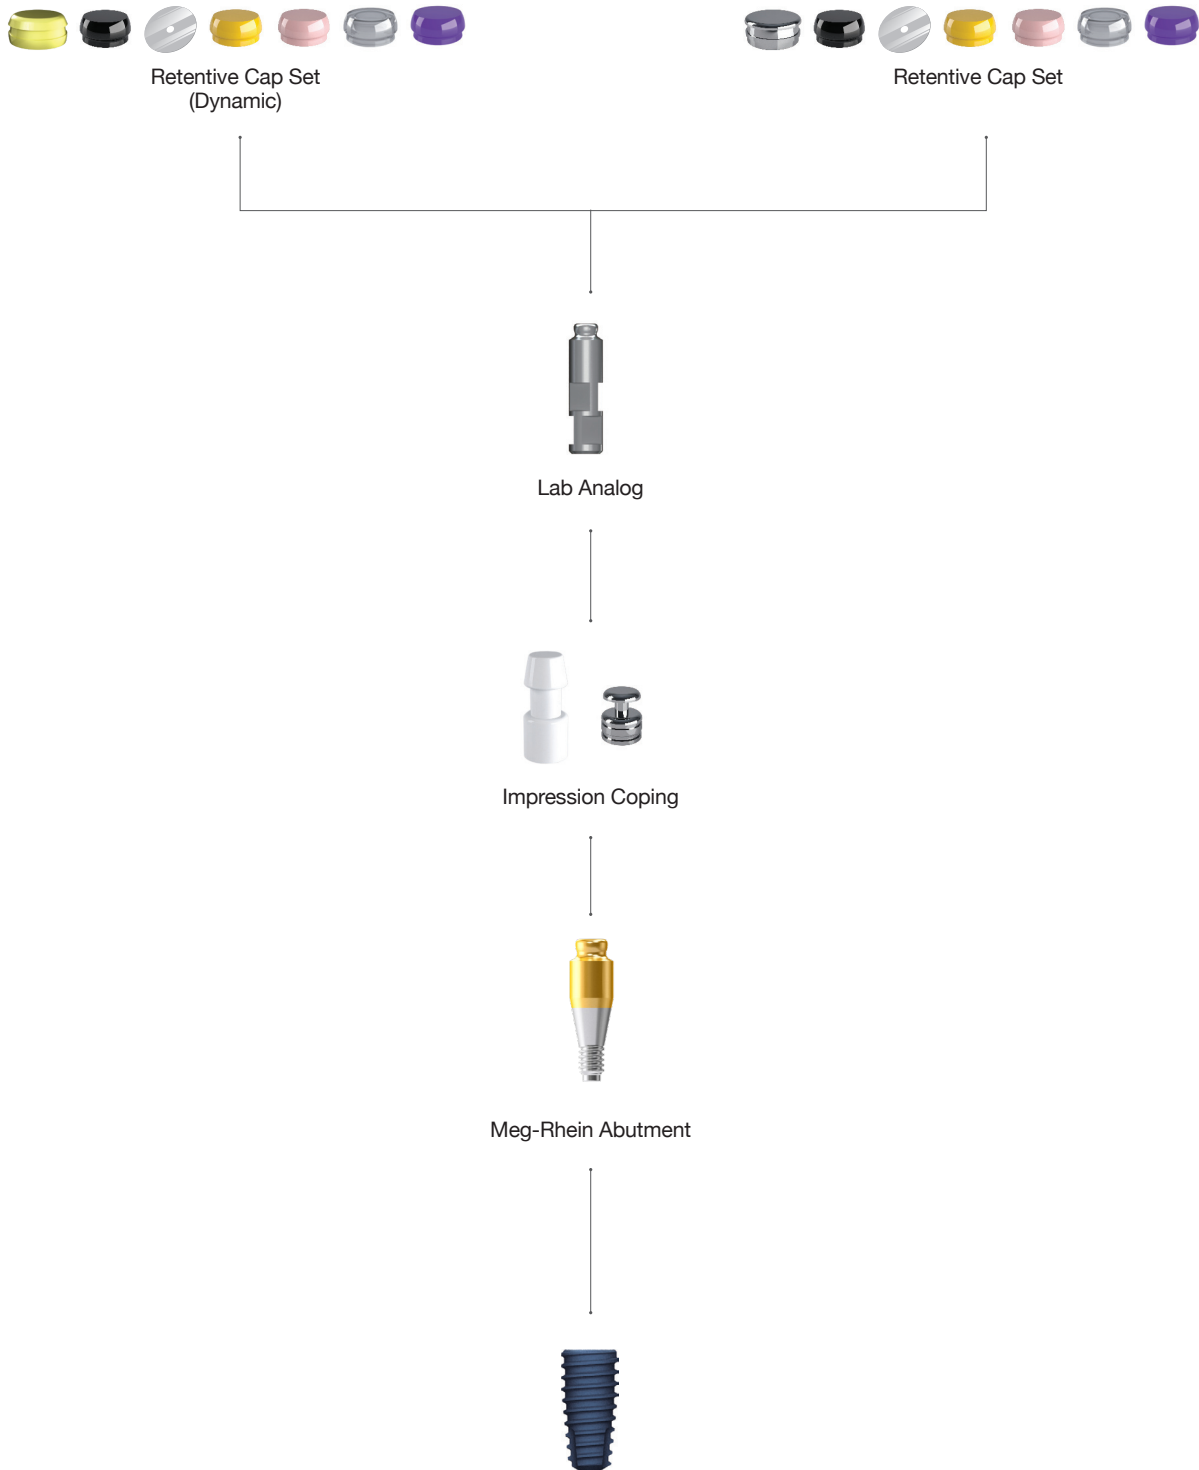

## ➔ Meg-Rhein Overdenture System

(Refer to the advantage of Meg-Rhein overdenture system on page.156)


### Meg-Rhein Overdenture System

(Dynamic)

- 1 Meg-Rhein Abutment
- 1 Plastic Impression Coping
- 1 Stainless Steel Housing (Dynamic) & Black-Lab
- 1 Protective Disk
- 4 Retentive Caps  
(Yellow-0.6kgf, Pink-1.2kgf, White-1.8kgf, Violet-2.7kgf)

- Perfect compatibility with the Rhein83 from Italy.
- Recommend torque : 35Ncm.

| Cuff Height (mm) | Ref.C  |
|------------------|--------|
| 0                | DR00PA |
| 1.0              | DR01PA |
| 2.0              | DR02PA |
| 3.0              | DR03PA |
| 4.0              | DR04PA |
| 5.0              | DR05PA |
| 6.0              | DR06PA |

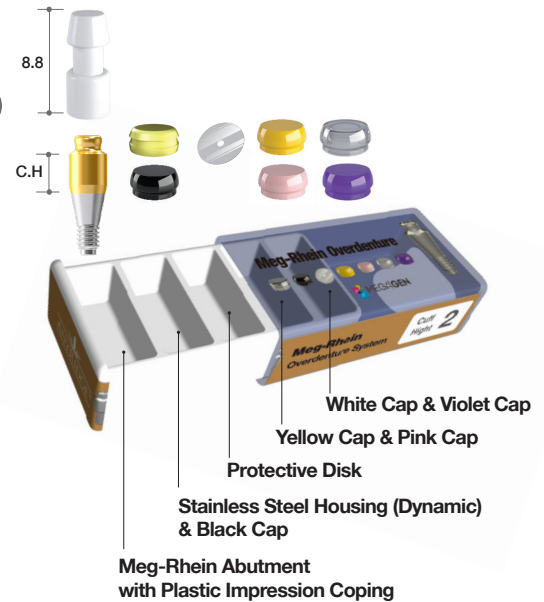

### Meg-Rhein Overdenture System

- 1 Meg-Rhein Abutment
- 1 Plastic Impression Coping
- 1 Stainless Steel Housing
- 1 Protective Disk
- 5 Retentive Caps  
(Black-Lab, Yellow-0.6kgf, Pink-1.2kgf, White-1.8kgf, Violet-2.7kgf)

- Perfect compatibility with the Rhein83 from Italy.
- Recommend torque : 35Ncm.


| Cuff Height (mm) | Ref.C |
|------------------|-------|
| 0                | DR00P |
| 1.0              | DR01P |
| 2.0              | DR02P |
| 3.0              | DR03P |
| 4.0              | DR04P |
| 5.0              | DR05P |
| 6.0              | DR06P |



## ➔ Components for Meg-Rhein Abutment


### Stainless Steel Housing

- 5ea/pack




### Stainless Steel Housing (Dynamic)

- 5ea/pack




### Retentive Caps (White)

- White cap(1.8kgf) - For refill (5ea/pack).
- Can be used for more retentive force following pink cap(1.2kgf).




### Retentive Caps (Violet)

- Violet cap(2.7kgf) - For refill (5ea/pack).
- Can be used for more retentive force following white cap(1.8kgf).




### Retentive Caps (Pink)

- Pink cap(1.2kgf) - For refill (5ea/pack).




### Retentive Caps (Yellow)

- Yellow cap(0.6kgf) - For refill (5ea/pack).




### Retentive Caps (Black)

- For laboratory




## Stainless Impression Coping (Pick-Up)

- 2ea/pack.
- Italy - Rhein 83 products.
- For accurate (pick-up type) impression.
- Metal with groove design to prevent from swaying.





## Lab Analog





## Caps and Clips Extractor tool

- Retentive Cap removal tool.

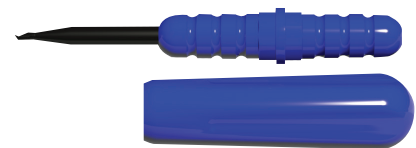

## Retentive Cap Insertion Tool


- Retentive Cap insertion tool.

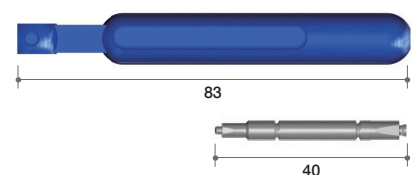


What is the fastest  
Integration time ?

Ask AnyOne®

XPEED® surface treatment  
inducing rapid osseointegration




- Induction of faster and stronger Osseointegration by  $Ca^{2+}$  ion deposition on S-L-A surface
- Complete removal of acid residue by neutralization reaction during XPEED procedure.

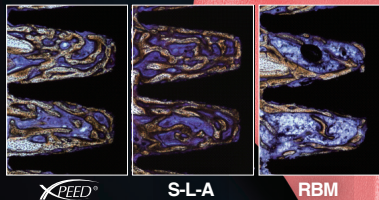


XPEED Surface Treatment presents much faster & stronger Osseointegration than RBM or S-L-A

High initial fixation!  
KnifeThread®



- Securement of initial stability with higher BIC
- Decentralize the stress on Cancellous bone
- Design that increases resistance and minimizes shearing force

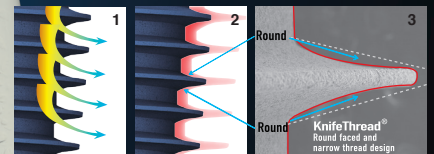

1. Stable dispersion of stress with Butress Thread shape
2. Easier Insertion with Sharp Thread shape
3. Increase the surface area of the round side compared with the straight side.



# Clinical Cases

## ➔ Clinical Case 1

- Courtesy of Dr. Jung Sam Lee

Single molar implant with bone augmentation.

**Fig 1.** The second molar was missing and the alveolar bone was moderated resorbed.

**Fig 2.** Osteotomy socket was made with drilling.

**Fig 3.** An implant was placed with excellent initial stability. Even there was no bone defect around the implant, bone graft was planned to make strong periimplant tissue.


**Fig 4.** Autogenous bone was harvested from the ramus with Auto-Max.

**Fig 5.** Bone grafting with collagen membrane coverage was made.

**Fig 6.** Tight soft tissue adaptation with the healing abutment.

**Fig 7.** Soft tissue profile after 3 months.


**Fig 8.** Before and after treatment. (6 months from the surgery)

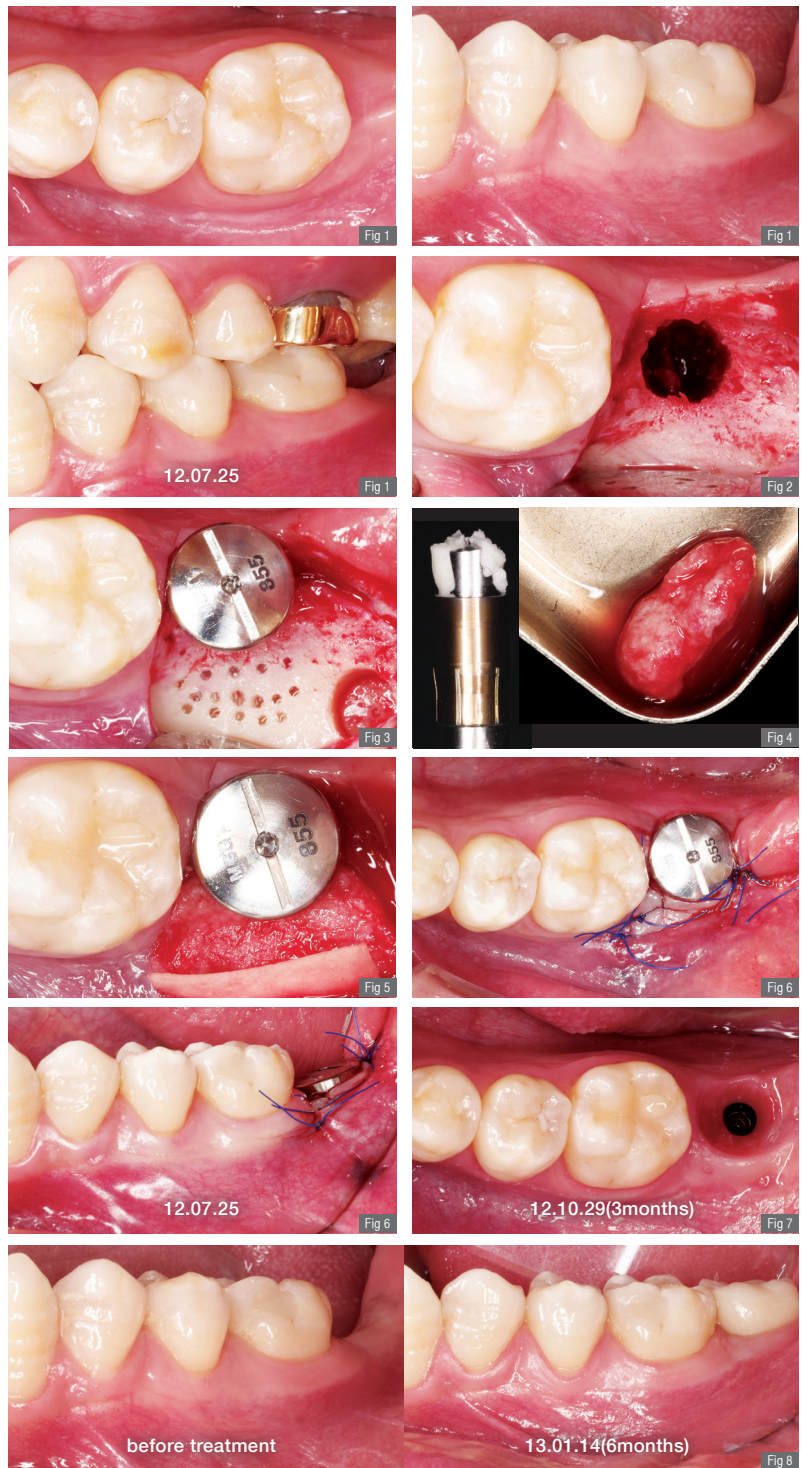


**Fig 9.** 2 years after surgery. Excellent esthetics and functions were maintained.



**Fig 10.** Intraoral radiographs on the follow-ups. Crestal bone maturation appeared interesting with time.

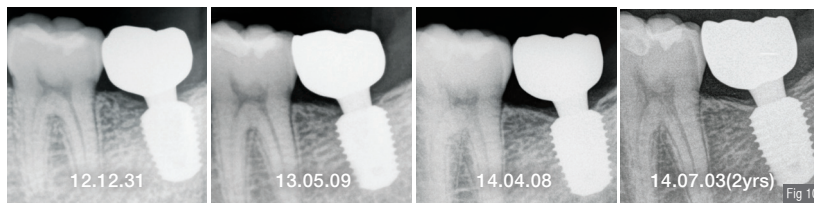

**Fig 11.** 5 years after surgery

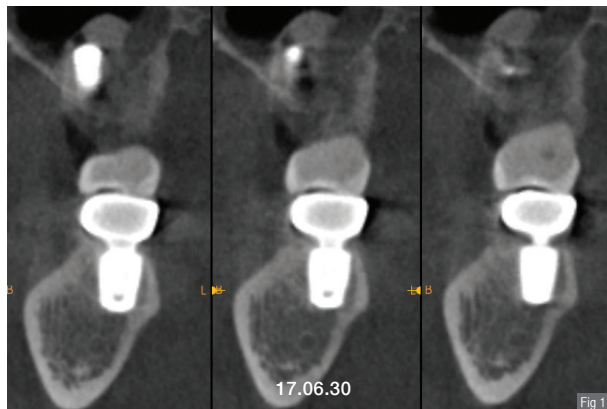

**Fig 12.** 5.5 years after surgery



## ➔ Clinical Case 2

- Courtesy of Dr. Jung Sam Lee

Two molar implants with i-Gen membrane.


**Fig 1.** The patient wanted to reconstruct two mandibular molars with implants.

**Fig 2.** There were moderate vertical and horizontal bone resorptions on the recipient sites.

**Fig 3.** After drilling for the osteotomy sockets, particulated autogenous bone was harvested with Auto-Max. PRP was prepared with patient's blood and mixed with autogenous and bovine bone.

**Fig 4.** Two implants were placed with excellent initial stability. There was no defect around implants, but bone regeneration was planned to make stable peri-implant tissues with i-Gen membrane and collagen membrane.

**Fig 5.** Primary closure was made following periosteal releasing incision.

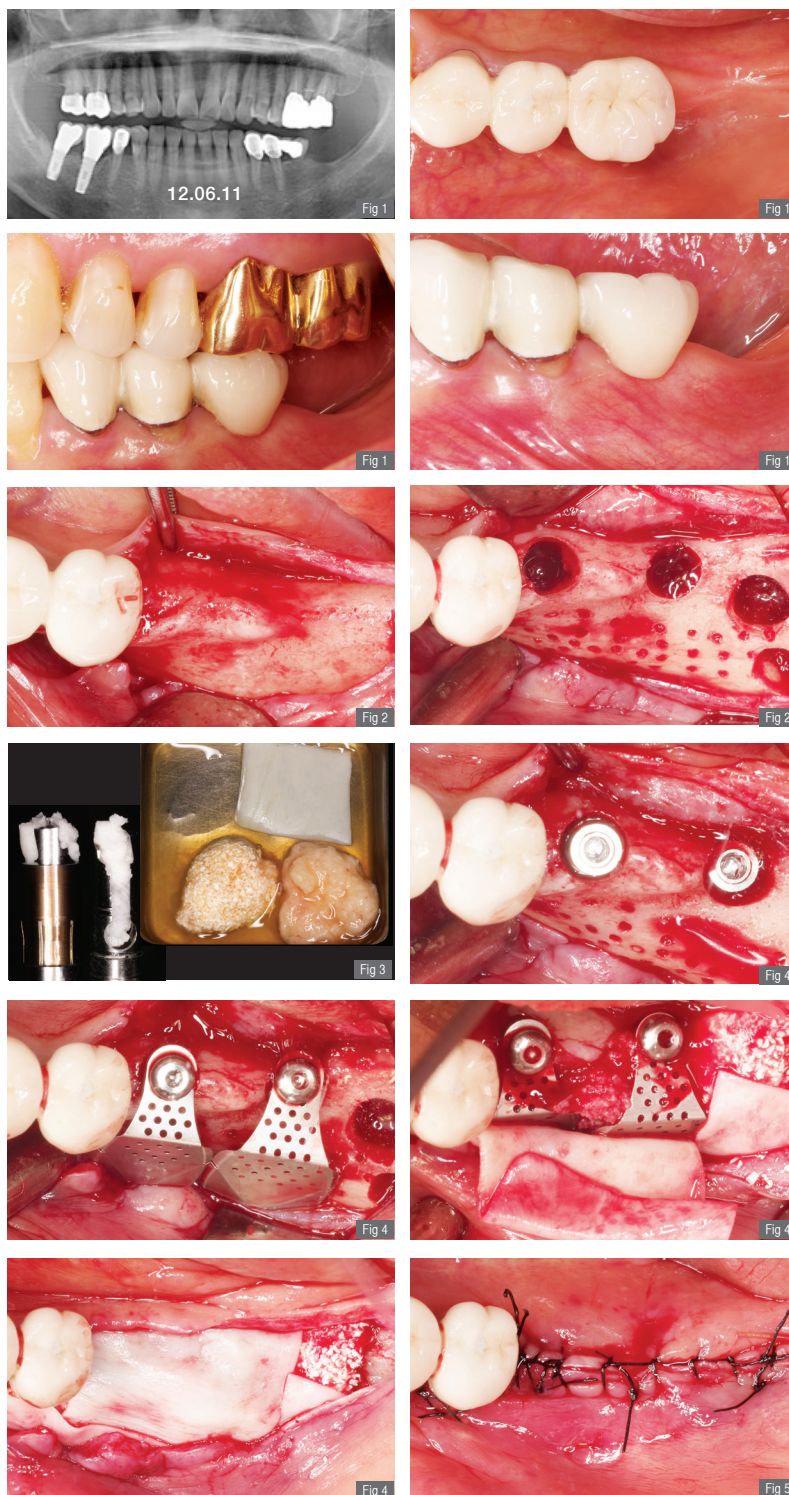

**Fig 6.** i-Gen membranes were removed after 2 months with simple incision. The regeneration appeared excellently with enough horizontal bone volume.

**Fig 7.** FGG was made to increase peri-implant keratinized gingiva.

**Fig 8.** Zirconia customized abutments with Ti-insert and full Zirconia crowns were made.

**Fig 9.** Clinical views after 1.5 years from the delivery of final restorations.

**Fig 10.** Intraoral radiograph after 11 months.

**Fig 11.** 5 years 1 month after surgery

